

oerlikon
leybold vacuum

RUVAC

Roots Vacuum Pumps

Single-Stage

250 - 13 000 m³ x h⁻¹ (147 - 7657 cfm)

173.01.02

Excerpt from the Oerlikon Leybold Vacuum Full Line Catalog

Product Section C07

Edition May 2007

Contents

General

Applications and Accessories	C07.03
General Information on Roots Vacuum Pumps	C07.04

Products

RUVAC WA/WAU Roots Vacuum Pumps with Air-Cooled Flange-Mounted Motors	C07.10
RUVAC WS/WSU Roots Vacuum Pumps with Air-Cooled Canned Motors	C07.16
RUVAC WS/WSU (W) PFPE Roots Vacuum Pumps with Water-Cooled Canned Motors	C07.22
RUVAC WSLF Roots Vacuum Pumps for Laser Gas Systems	C07.28
RUVAC RA Roots Vacuum Pumps with Flange-Mounted Motors	C07.30

Accessories

Pressure Switches	C07.34
Temperature Sensor PT 100	C07.34

Miscellaneous

Vacuum Pump Oils	C07.35
Services	C07.40

General

Applications and Accessories

Roots Vacuum Pumps	WAWAU	WSWSU	WSMSU(W) PFPE	WSLF	RA
Applications					
Semiconductor production			■		
Vacuum coating	■				■
Large scale research		■			■
Chemistry/Pharmaceutical	■				■
Metallurgy/Furnaces	■	■			■
Lamps and tubes manufacture		■			
Laser engineering				■	
Packaging	■				
Central vacuum supply systems	■	■			
Freeze drying	■	■			
Leak testing systems		■			
Electrical engineering	■	■			■
High purity gases/closed refrigerant cycles		■		■	
Mechanical engineering	■	■	■	■	■
Automotive industry	■	■	■	■	■

Accessories

Page

Frequency inverter RUVATRONIC RT	C07.09	■	■	■	■	■
Pressure switches	C07.34	■	■	■	■	■
Temperature sensor PT 100	C07.34	■ ¹⁾				

¹⁾ For ATEX pumps only


General Information on Roots Vacuum Pumps

Applications

For many years now Roots vacuum pumps have been well established in the area of vacuum technology. In combination with backing pumps, which compress against the atmosphere, these pumps offer the following advantages:

Shifting the Operating Pressure into the High Vacuum Range

As a rule of the thumb one may say that Roots vacuum pumps are capable of improving the attainable ultimate pressure of a pump system by a factor of 10. With two Roots vacuum pump stages and a corresponding backing pump it is possible to attain pressures in the range down to 10^{-5} mbar (0.75×10^{-5} Torr). Under certain circumstances this will make the use of additional high vacuum pumps (turbo-molecular pumps or diffusion pumps) unnecessary.

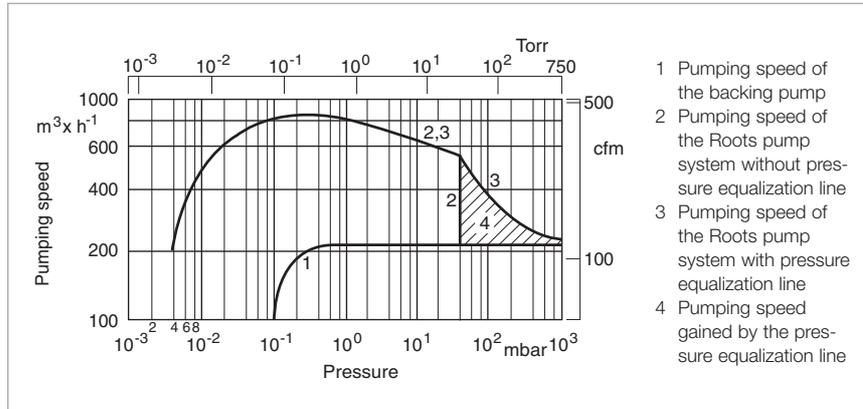


Comparison of pumping speed characteristics with and without pressure equalization line

Multiplied Pumping Speed

Due to the non-contact rotation of the impellers, Roots vacuum pumps are able to run at higher speeds. Thus a high pumping speed is obtained with a relatively small size pump. Pumping speeds in excess of $1000 \text{ m}^3/\text{h}$ (589 cfm) can only be attained with Roots vacuum pumps.

When selecting the right kind of backing pump (sizing) it will be possible to pump large quantities of gas in connection with smaller backing pumps. Energy consumption of such a pump system is much less compared to a single backing pump offering the same pumping speed.

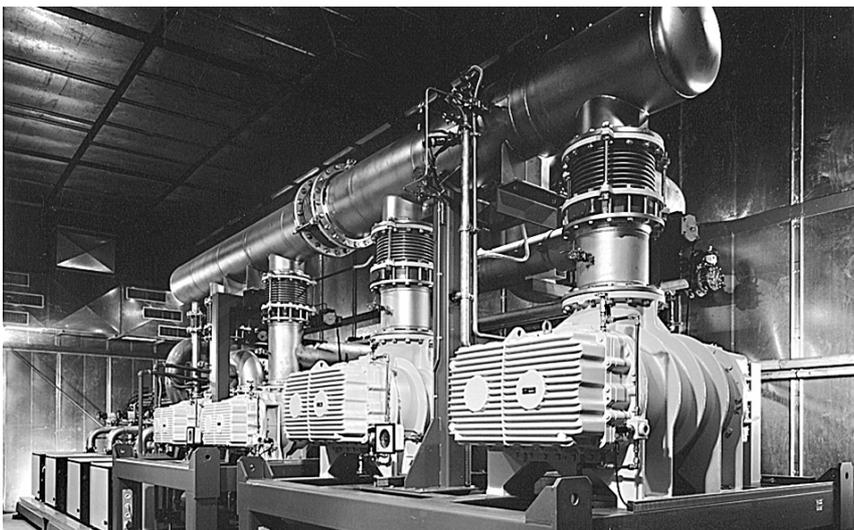

Pump system with RA Roots vacuum pumps

The use of Roots vacuum pumps in the area of vacuum technology has resulted in further specializations and improvements:

- Through an integrated bypass (pressure equalization line) it is also possible to utilize the pumping speed of the Roots vacuum pump at high pressures and large quantities of gas at an early stage. This reduces the pumpdown time especially for cyclic operation (see figure "Comparison of pumping speed characteristics with and without pressure equalization line").
- High-purity gases or hazardous gases impose strict requirements on the leak-tightness of the system. Canned motors are hermetically sealed. There are no seals in

contact with the atmosphere which might be subject to wear. This prevents leaks and failures due to oil leaks. A service life of over 20000 hours without maintenance is quite common.

- Tolerances and the quality of the balancing combined with forced lubricated bearings and toothed gears permit high speeds and the use of frequency converters. Thus it is possible to attain a high pumping speed while the process is in progress and to reduce the speed when the process has been stopped or while changing the batch. This results in a lower consumption of energy and a longer service life with uncompromised reliability.


- Conversion from vertical to horizontal flow is easily implemented and can be performed at the place where the pump has been installed. Thus the pump can be adapted more closely to the operating conditions of your system.

Lately, a further characteristic is gaining prominence: Roots vacuum pumps are capable of compressing the media in the pump chamber without the presence of any further media. This mostly avoids interaction between different media in the pump itself and also in the connected vacuum chamber. Therefore

- the medium which is pumped is not contaminated with lubricants or sealants; complex accessories (exhaust filters, separators, etc.) are not needed;
- the lubricant in the side chambers is hardly affected, so that service life is not reduced;
- backstreaming of oil from the backing pump into the connected vacuum chamber is prevented.

The effective air cooling arrangement reduces operating costs to a minimum. Cooling water is not required.

These characteristics make the Roots vacuum pump attractive for almost all rough and medium vacuum applications.

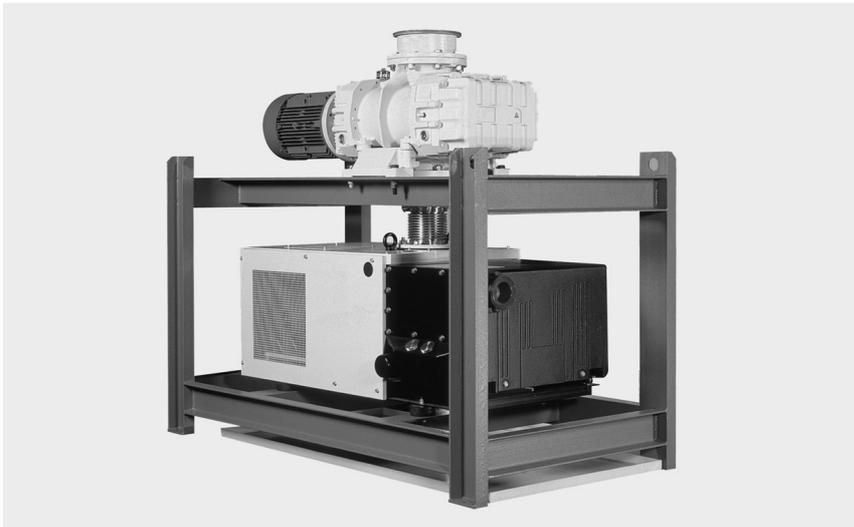

Pump system with RA Roots vacuum pump and SOGEVAC rotary vane vacuum pump

Semiconductor Technology

In the area of semiconductor technology, Roots vacuum pumps are found in etching processes among others, and in use with dry compressing vacuum pumps.

The pumping speed of the combination of backing pumps amounts to 200 to 500 m³/h (118 to 295 cfm) and it ensures a cut-in pressure of 10⁻¹ mbar (0.75 x 10⁻¹ Torr) for the turbomolecular pump. In the case of dry compression, corrosive gases which also have a high particulate content must be pumped.


Canned motors and PFPE fluids provide a good seal against the outside and allow long periods between servicing, high reliability and thus very low operating costs (WS PFPE types).

Specific suitable for this processes and use in clean rooms are Roots vacuum pumps filled with PFPE and water-cooled motors.

These kind of motor has only a little heat dissipation.

Central Vacuum Supply Systems

Large Roots vacuum pumps, usually in connection with single-stage rotary vane vacuum pumps serve several consumers of vacuum (packaging machines, for example) at the same time.

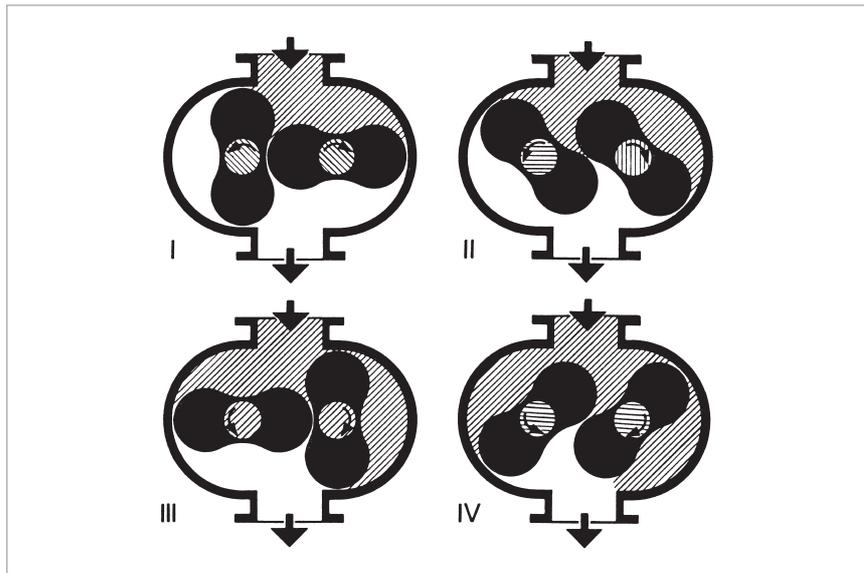

Operational diagram of a single-stage Roots vacuum pump (with vertical pumping action)

Due to the uncontrolled influx of gas, a high of pumping speed must be attained quickly, in order to keep the vacuum (1 to 30 mbar (0.75 to 22.5 Torr)) permanently available to all consumers. This in particular, is implemented by Roots vacuum pumps having a pressure equalization line (WAU types).

Chemistry

Replacement of vapor jet or gas jet pumps on liquid ring pumps in drying and distillation plants is necessary for attaining the required operating pressure of about 1 mbar (0.75 Torr). Reduction of operating costs by entirely eliminating vapor or gas quantities includes separation of these on the pressure side (WA and RA types).

Laser Systems

Continuous circulation of the gas in order to remove heat from a closed cycle in which pressure differentials of up to 100 mbar (75 Torr) must be maintained. The tough requirements regarding purity necessitate a total absence of contamination by oil and dust. This is ensured by reducing the pressure level in the oil chambers as well as by coating the pump chamber. The pumps are assembled and tested under clean room conditions.

The canned motor ensures a high degree of leak-tightness to the outside and permits operation in connection with a frequency converter (WSLF types).

Operating Principle

Roots vacuum pumps, which are also called Roots blowers, are rotary plunger type pumps where two symmetrically shaped impellers rotate in opposite directions inside the pump housing.

The figure-of-eight rotors are synchronized by a gear which ensures that the impellers are counter-rotating in such a way, that they are near to one another and to the housing without actual contacting.

In rotor positions I and II (see figure "Operational diagram of a single-stage Roots vacuum pump (with vertical pumping action)") the volume of the intake is increased. As the rotors turn further to position III a part of the volume is cut off from the intake side.

In position IV this volume is opened to the exhaust side and gas under fore-vacuum pressure (higher than the intake pressure) flows in. This gas compresses the gas coming from the intake. As the rotors turn further the compressed gas is ejected through the exhaust flange.

This process repeats itself twice for each rotor per full turn.

As the rotors do not come into contact with the pump's housing Roots vacuum pumps may be operated at high speeds. Thus a high pumping speed is obtained from comparably small pumps.

The pressure difference and the compression ratio between intake and exhaust is limited in Roots vacuum pumps.

In practice the maximum attainable pressure difference is of significance only in the rough vacuum range ($p > 10 \text{ mbar}$ ($p > 7.5 \text{ Torr}$)) whereas in the medium vacuum range ($p < 1 \text{ mbar}$ ($p < 0.75 \text{ Torr}$)) the attainable compression ratio is of importance.

Roots vacuum pumps from Oerlikon Leybold Vacuum have been designed to specially meet the requirements of the fine vacuum range. They are normally used in connection with backing pumps (exception RAV) or in closed gas cycles (WSLF series).

Design

The pump chamber of Roots vacuum pumps is free of any sealing agents or lubricants. Only the toothed wheels of the synchronous gear are lubricated with oil. Toothed gear wheels and bearings of the RUVAC are placed in two side chambers which also contain the oil reservoir. These two side chambers are separated from the pump chamber by piston ring seals.

Suitably designed oil supply systems in both chambers ensure that a sufficient quantity of oil is supplied to the gear wheels and bearings at all permissible speeds.

Almost all RUVAC Roots vacuum pumps are designed for a horizontal and vertical pumping action.



Pump system consisting of RUVAC WAU 1001 and SOGEVAC SV 200

Types

Various types of Roots vacuum pumps have been developed to ensure optimum adaptation to the widely varying applications for this type of pump.

- Flange mounted motor

The drive shaft of the pump is directly connected to an electric motor via a flexible coupling. The required seal of the drive shaft against atmospheric pressure is obtained by oiled shaft seals.

- Canned motor

In the canned motor, rotor and stator pack are separated by a vacuum-tight can made of a non-magnetic material. The rotor operates on the drive shaft of the pump in the vacuum, so that a shaft seal which would be subject to wear is not required.

- Pressure equalization line

The integrated pressure equalization line connects the exhaust flange to the intake flange through a differential pressure valve.

This valve opens at a high pressure differential between the flanges. Part of the gas then flows through this line back to the intake flange. This is why the Roots vacuum pump may be switched on at atmospheric pressure together with the backing pump. This also increases the pumping speed of the pump combination at high intake pressures.

- Special ACE vibration absorber

These pumps are best used in applications involving frequent pump-down cycles. The vibration absorber is of an oil sealed or filled design where minute amounts of oil may enter the vacuum system via the piston of the vibration attenuator.

RUVAC WA/WAU, WS/WSU

The series WA/WAU Roots vacuum pumps are provided with directly flange-mounted air-cooled standard three-phase motors. The oiled radial sealing rings of the RUVAC WA/WAU for sealing the shaft against the atmosphere are made of FPM (fluor caoutchouc).

The WS/WSU series pumps are driven by air or water-cooled canned motors.

Roots vacuum pumps of the series WAU/WSU are provided with an additional integrated pressure equalization line and a differential pressure valve.

Pumps from these series are supplied with a vertical pumping action as standard.

RUVAC WS with FC

This type of pump is equipped with an integrated frequency converter fitted directly to the canned motor. The frequency converter has been specially matched to the pump.

The main characteristics of the RUVAC WS are:

Simulation of a pressure equalization line

The frequency converter has been matched to the pump so that the possibility of mechanically overloading it is excluded. In the case of a pressure difference which is too high, the rotational speed of the pump is automatically reduced until its load drops in to the permissible range.

Operation at any rotational speeds

The frequency converter is equipped with a 0 to 10 V signal input and is thus in a position to control the rotational speed of the pump.

Increasing the pumping speed

The pump is prepared to handle a maximum rotational speed of 6000 rpm so that the frequency converter permits an increase in the nominal pumping speed of up to 100%.

Note

Please enquire about possibly existing usage limits (process dependent).

RUVAC WSLF

The pumps of these series are especially adapted Roots vacuum pumps from the RUVAC WS series which are intended for operation with gas lasers.

They are driven by a canned motor so that a shaft seal for sealing against atmospheric pressure is not required.

Air-cooled series with nominal pumping speeds of $1000 \text{ m}^3 \times \text{h}^{-1}$ (589 cfm) are available.

The RUVAC WSLF series with increased motor ratings is intended for operation in connection with frequency converters.

These pumps are available with nickel-plated or plasma-nitrated surface as standard.

All pumps of these series are supplied with a horizontal pumping action.

Vertical pumping action is available upon request.


RUVAC RA

RA series Roots vacuum pumps are equipped with a directly flange-mounted three-phase motor (RA 13000 via V-belt drive).

Backing Pumps

The backing pumps from Oerlikon Leybold Vacuum listed in the following are recommended for connection to the RUVAC Roots vacuum pumps:

- Rotary vane vacuum pumps
 - TRIVAC B with pumping speeds between 16 and 65 m³ x h⁻¹ (9.4 and 38.3 cfm)
 - SOGEVAC with pumping speeds between 16 and 1200 m³ x h⁻¹ (9.4 and 707 cfm)
- Dry compressing piston vacuum pumps
 - ECODRY M with pumping speeds between 38 and 48 m³ x h⁻¹ (22 and 28 cfm)
- Dry compressing screw vacuum pumps
 - SCREWLINE SP250 and SP630 with pumping speed of 250 and 630 m³ x h⁻¹ (147 and 371 cfm)
- Rotary piston vacuum pumps
 - E and DK with pumping speeds between 200 and 250 m³ x h⁻¹ (117.8 and 147.3 cfm)
- Roots vacuum pumps with pre-inlet cooling
 - RUVAC RAV G with pumping speeds between 250 and 8100 m³ x h⁻¹ (147.3 and 4770.9 cfm)
- Liquid ring vacuum pumps upon request

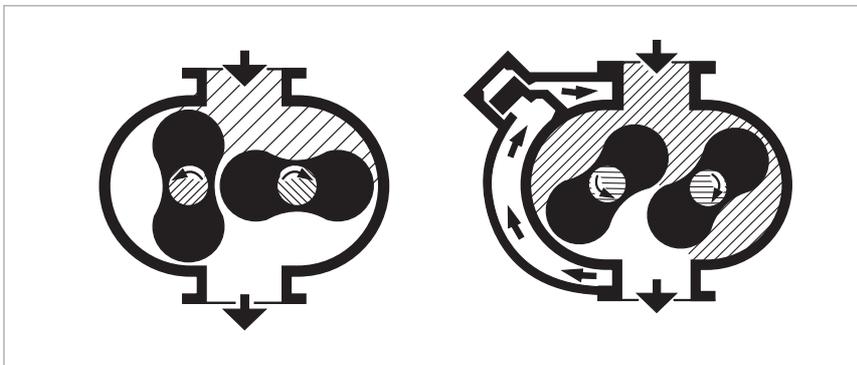

Schematic section through a RUVAC WA/WS (left) and a RUVAC WAU/WSU (right)

Accessories

Frequency Inverter RUVATRONIC RT 5

The electronic frequency inverters RUVATRONIC RT 5/251 to 5/16000 have been designed specially for use in connection with Oerlikon Leybold Vacuum Roots pumps of the RUVAC type.

For each Roots vacuum pump size, a matching frequency inverter is available.

The main characteristics of the RUVATRONIC RT 5 are: Simulation of a pressure equalisation line

The software of the frequency inverters is adapted to each pump and ensures that the risk of mechanically overloading the pump can be excluded. In the case of too high pressure differences, the rotational speed will be decreased automatically until the load is reduced to within the pump's limits. RUVAC Roots vacuum pumps of the types WA, WS and RA (without pressure equalisation line) can be switched on together with the forepump at atmospheric pressure. Through this, the pumpdown time can be reduced drastically. The minimum pumping speed of the backing pump needs to be considered in this case.

In connection with this kind of operation, the minimum pumping speed of the backing pump needs to be observed.

Pump	Required pumping speed for the backing pump
WA/WS 251	50 m ³ /h (29 cfm)
WA/WS 501	100 m ³ /h (59 cfm)
WA/WS 1001	200 m ³ /h (118 cfm)
WA/WS 2001	410 m ³ /h (241 cfm)
RA 3001	650 m ³ /h (383 cfm)
RA 5001	930 m ³ /h (547 cfm)
RA 7001	1250 m ³ /h (736 cfm)
RA 9001	3240 m ³ /h (1907 cfm)

Operation at up to 3 predefined speeds

Via floating contacts, the pump can be operated at one of the 3 predefined speeds. Switching over to another predefined speed is possible during operation.

Operation at any rotational speed

With a 0 to 10 V signal, any speed can be predefined to operate the pump between the minimum and maximum rotational speed. The software reliably ensures that the rotational speed cannot drop below the minimum speed or exceed the maximum speed.

Increase in the pumping speed

By operating the Roots vacuum pumps at frequencies over 50 Hz, the nominal pumping speed of the pumps can be increased. Depending on the type of pump, an increase between 20 and 100% is possible.

Note

Please enquire about possible application limitations (process dependent).


Dust Separators and Dust Filters

Vacuum processes with a high particle count or involving significant quantities of dust require special measures for protecting the vacuum pumps.

Dust separators and dust filters can be found in chapter "Accessories" of Catalog Section C08.

Products

RUVAC WA/WAU Roots Vacuum Pumps with Air-Cooled Flange-Mounted Motors

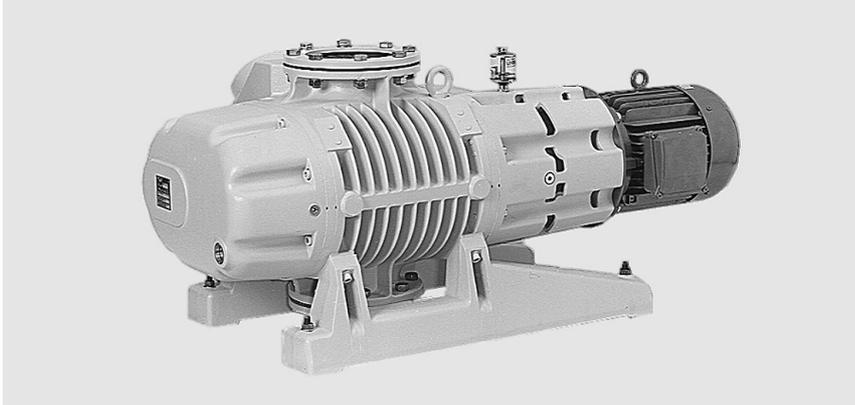

RUVAC WAU 2001 single-stage Roots vacuum pump shown with ISO-K 160 collar flanges

Advantages to the User


- Two air-cooled series, each with four models
- Reliable and trouble-free
- Sealing rings with their housing can be readily replaced
- Shaft seals and elastomer seals made of FPM/Viton
- Air-cooled standard motors in accordance with IEC dimensions eg. NEMA dimensions
- Easy to exchange with custom motors
- Integrated pressure equalization line for protection against overloading at high pressures on WAU models
- Pumping direction may be changed as required
- ATEX versions compliant to 94/9/EC possible

Typical Applications

- For oil-free compression of gases and vapors in combination with a backing pump
- Short cycle pumping processes also in the presence of large quantities of gas and vapor

Supplied Equipment

- RUVAC WA/WAU are supplied as standard for a vertical pumping action, horizontal pumping action upon request
- Mineral oil N 62 is used as standard
- Gasket in the intake flange with dirt sieve
- The required oil filling is included in separate bottles

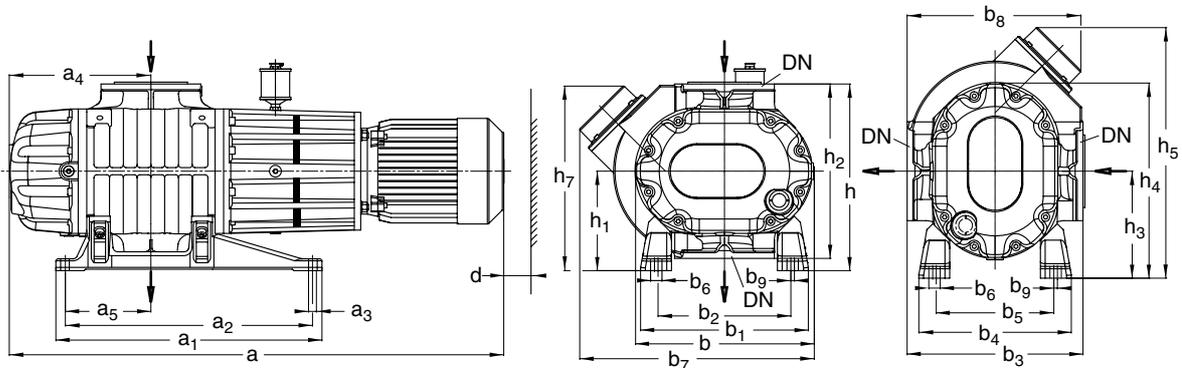

Type		DN/DN ₁	a ¹⁾	a ²⁾	a ₁	a ₂	a ₃	a ₄	a ₅	a ₆		
WA/WAU 251	mm	63 ISO-K	732	790	405	365	14	209	120	194		
	in.		28.82	31.10	15.94	14.37	0.55	8.23	4.72			
7.64												
WA/WAU 501	mm	63 ISO-K	830	918	486	450	14	237	155	218		
	in.		32.68	36.14	19.13	17.72	0.55	9.33	6.10			
8.58												
WA/WAU 501H	mm	63 ISO-K	830	918	486	450	14	237	155	218		
	in.		32.88	36.14	19.13	17.72	0.55	9.33	6.10			
8.58												
WA/WAU 1001	mm	100 ISO-K	1054	1085	560	520	16.5	298	180	262		
	in.		41.50	42.72	22.05	20.47	0.65	11.73	6.10			
10.31												
WA/WAU 1001H	mm	100 ISO-K	1054	1085	560	520	16.5	298	180	262		
	in.		41.50	42.72	22.05	20.47	0.65	11.73	6.10			
			b	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇ ³⁾	b ₈	b ₉
WA/WAU 251	mm		250	270	210	280	230	170	24	305	285	7.5
	in.		9.84	10.63	8.27	11.02	9.06	6.69	0.94	12.01	11.22	0.30
WA/WAU 501	mm		310	299	229	320	271	201	24	390	313	7.5
	in.		12.20	11.77	9.02	12.60	10.67	7.91	0.94	15.35	12.32	0.30
WA/WAU 501H	mm		310	299	229	320	271	201	24	414	330	7.5
	in.		12.20	11.77	9.02	12.60	10.67	7.91	0.94	16.30	12.99	0.30
WA/WAU 1001	mm		376	352	278	370	320	246	24	494	366	7.5
	in.		14.80	13.86	10.94	14.57	12.60	7.91	0.94	19.45	14.41	0.30
WA/WAU 1001H	mm		376	352	278	370	320	246	24	524	398	7.5
	in.		14.80	13.86	10.94	14.57	12.60	7.91	0.94	20.63	15.67	0.30
WA/WAU 2001	mm		463	518	388	460	422	292	24	638	456	7.5
	in.		18.23	20.39	15.28	18.11	16.61	11.50	0.94	25.12	17.95	0.30
WA/WAU 2001H	mm		463	518	388	460	422	292	24	642	460	7.5
	in.		18.23	20.39	15.28	18.11	16.61	11.50	0.94	25.28	18.11	0.30
			d	h	h ₁	h ₂	h ₃	h ₄	h ₅ ²⁾	h ₆	h ₇	
WA/WAU 251	mm		50	300	160	280	180	306	360	330	307	
	in.		2.00	11.81	6.30	11.02	7.09	12.05	14.17	12.99	12.09	
WA/WAU 501	mm		50	340	180	320	194	348	430	370	332	
	in.		2.00	13.39	7.09	12.60	7.48	13.70	16.93	14.57	13.07	
WA/WAU 501H	mm		50	340	180	320	194	348	450	370	350	
	in.		2.00	13.39	7.09	12.60	7.48	13.70	17.72	14.57	13.78	
WA/WAU 1001	mm		50	396	211	370	227	414	532	425	392	
	in.		2.00	15.59	8.31	14.57	8.94	16.30	20.94	425	15.43	
WA/WAU 1001H	mm		50	396	211	370	227	414	564	425	424	
	in.		2.00	15.59	8.31	14.57	8.94	16.30	22.20	425	16.69	
WA/WAU 2001	mm		50	530	300	460	351	578	753	541	523	
	in.		2.00	20.87	11.81	18.11	13.82	22.76	29.65	21.3	20.59	
WA/WAU 2001H	mm		50	530	300	460	351	578	760	541	530	
	in.		2.00	20.87	11.81	18.11	13.82	22.76	29.92	21.3	20.87	

¹⁾ This dimension "a" relates to pumps with the IEC motor used as standard by Oerlikon Leybold Vacuum

²⁾ This dimension "a" relates to pumps with the NEMA motor used as standard by Oerlikon Leybold Vacuum

³⁾ For RUVAC WAU only

DN = ND 6 pump flange in accordance with DIN 2501

DN₁ = Collar flange with gasket for connecting ISO-K standard components

Outside dimensions +/- 3 mm (0.12 in.)

Dimensional drawing for the RUVAC WA/WAU pumps

Technical Data

WA/WAU 251

WA/WAU(H) 501

		50 Hz	60 Hz	50 Hz	60 Hz
Nominal pumping speed ¹⁾	m ³ x h ⁻¹ (cfm)	253.0 (149.0)	304.0 (179.0)	505.0 (297.4)	606.0 (357.0)
Max. pumping speed with backing pump	m ³ x h ⁻¹ (cfm)	210.0 (123.7)	251.0 (148.0)	410.0 (241.0)	530.0 (312.0)
	TRIVAC	D 65 B	D 65 B	–	–
	SOGEVAC	–	–	SV 200	SV 200
Ultimate partial pressure ²⁾	mbar (Torr)	< 2 x 10 ⁻⁵ (< 1.5 x 10 ⁻⁵)	< 2 x 10 ⁻⁵ (< 1.5 x 10 ⁻⁵)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)
Ultimate total pressure ²⁾	mbar (Torr)	< 8 x 10 ⁻⁴ (< 6 x 10 ⁻⁴)	< 8 x 10 ⁻⁴ (< 6 x 10 ⁻⁴)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)
Permissible cut-in pressure ²⁾					
RUVAC WA	mbar (Torr)	90.0 (67.5)	60.0 (45.0)	100.0 (75.0)	80.0 (60.0)
Max. permissible pressure difference during continuous operation ³⁾	mbar (Torr)	80.0 (60.0)	80.0 (60.0)	80.0 (60.0)	80.0 (60.0)
Main supply					
IEC motor (ATB) ⁴⁾	Δ / Y V	220-240 / 380-420	220-277 / 380-480	220-240 / 380-420	220-277 / 380-480
NEMA motor (US version) ⁴⁾	Δ / Y V	230 / 400	200-230 / 460	230 / 400	200-230 / 460
Thermal class		F	F	F	F
Motor power	kW (hp)	1.1 (1.5)	1.1 (1.5)	2.2 (3.0)	2.2 (3.0)
Nominal speed, approx. (50/60 Hz)	rpm	3000/3600	3000/3600	3000/3600	3000/3600
Max. permissible speed	rpm	3600	3600	3600	3600
Type of protection	IP	55	55	55	55
Oil filling for the bearing chamber ⁵⁾		1. Filling ⁶⁾ / 2. Filling	1. Filling ⁶⁾ / 2. Filling	1. Filling ⁶⁾ / 2. Filling	1. Filling ⁶⁾ / 2. Filling
vertical pumping action, approx.	I (qt)	0.65 (0.69) / 0.6 (0.63)	0.65 (0.69) / 0.6 (0.63)	0.9 (0.95) / 0.8 (0.85)	0.9 (0.95) / 0.8 (0.85)
horizontal pumping action, approx.	I (qt)	0.5 (0.53) / 0.45 (0.48)	0.5 (0.53) / 0.45 (0.48)	0.75 (0.79) / 0.7 (0.74)	0.75 (0.79) / 0.7 (0.74)
Oil filling of the shaft sealing ring housing	I (qt)	0.6 (0.63)	0.6 (0.63)	1.0 (1.06)	1.0 (1.06)
Connection flanges ⁷⁾	DN	63 ISO-K	63 ISO-K	63 ISO-K	63 ISO-K
	DN	3" ANSI	3" ANSI	3" ANSI	3" ANSI
Weight WA/WAU	kg	85.0/89.0	85.0/89.0	128.0/133.0	128.0/133.0
	(lbs)	(187.4/196.2)	(187.4/196.2)	(282.2/293.3)	(282.2/293.3)
Noise level ⁸⁾	dB(A)	< 64	< 64	< 67	< 67

¹⁾ To DIN 28 400 and subsequent numbers

²⁾ With double-stage rotary vane vacuum pump TRIVAC, resp. single-stage rotary vane vacuum pump SOGEVAC (Type of backing pump look at max. pumping speed).

When using 2-stage backing pumps the ultimate pressures will be correspondingly lower

³⁾ Applicable for ratio up to 1 : 10 between backing pump and Roots vacuum pump at 3000 rpm

⁴⁾ Motor voltage and current may deviate depending on the type of motor.

Please always note the information on the nameplate

⁵⁾ Authoritative, however, is the oil level at the oil-level glass

⁶⁾ After a complete disassembly

⁷⁾ US models ANSI flanges

⁸⁾ At an operating pressure below < 10⁻¹ mbar (< 0.75 x 10⁻¹ Torr)

Technical Data

WA/WAU (H) 1001

WA/WAU(H) 2001

		50 Hz	60 Hz	50 Hz	60 Hz
Nominal pumping speed ¹⁾	m ³ x h ⁻¹ (cfm)	1000 (589)	1200 (707)	2050 (1207.5)	2460 (1449)
Max. pumping speed with backing pump	m ³ x h ⁻¹ (cfm) SOGEVAC	800 (470) SV 300	1000 (588) SV 300	1850 (1089) SV 630 F	2100 (1236) SV 630 F
Ultimate partial pressure ²⁾	mbar (Torr)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)
Ultimate total pressure ²⁾	mbar (Torr)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)
Permissible cut-in pressure ²⁾ RUVAC WA	mbar (Torr)	60.0 (45.0)	45.0 (33.5)	30.0 (22.5)	25.0 (18.5)
Max. permissible pressure difference during continuous operation ³⁾	mbar (Torr)	80.0 (60.0)	80.0 (60.0)	50.0 (37.5)	50.0 (37.5)
Main supply					
IEC motor (ATB) ⁴⁾	Δ / Y V	220-240 / 380-420	220-277 / 380-480	- / 380-420	- / 380-480
NEMA motor (US version) ⁴⁾	Δ / Y V	230 / 400	200-230 / 460	400 / -	460 / -
Thermal class		F	F	F	F
Motor power	kW (hp)	4.0 (5.4)	4.0 (5.4)	7.5 (10.0)	7.5 (10.0)
Nominal speed, approx. (50/60 Hz)	rpm	3000/3600	3000/3600	3000/3600	3000/3600
Max. permissible speed	rpm	3600	3600	3600	3600
Type of protection	IP	55	55	55	55
Oil filling for the bearing chamber ⁵⁾ vertical pumping action, approx.		1. Filling ⁶⁾ / 2. Filling			
	I (qt)	2.0 (2.11) / 1.8 (1.90)	2.0 (2.11) / 1.8 (1.90)	3.85 (4.07) / 3.6 (3.81)	3.85 (4.07) / 3.6 (3.81)
horizontal pumping action, approx.					
	I (qt)	1.2 (1.27) / 1.1 (1.16)	1.2 (1.27) / 1.1 (1.16)	2.65 (2.75) / 2.4 (2.54)	2.65 (2.75) / 2.4 (2.54)
Oil filling of the shaft sealing ring housing	I (qt)	1.3 (1.37)	1.3 (1.37)	1.6 (1.69)	1.6 (1.69)
Connection flanges ⁷⁾	DN	100 ISO-K	100 ISO-K	160 ISO-K	160 ISO-K
	DN	4" ANSI	4" ANSI	6" ANSI	6" ANSI
Weight WA/WAU	kg (lbs)	220.0/225.0 (485.1/496.1)	220.0/225.0 (485.1/496.1)	400.0/406.0 (882/895.2)	400.0/406.0 (882/895.2)
Noise level ⁸⁾	dB(A)	< 75	< 75	< 80	< 80

¹⁾ To DIN 28 400 and subsequent numbers

²⁾ With single-stage rotary vane vacuum pump SOGEVAC (Type of backing pump look at max. pumping speed).
When using 2-stage backing pumps the ultimate pressures will be correspondingly lower

³⁾ Applicable for ratio up to 1 : 10 between backing pump and Roots vacuum pump at 3000 rpm

⁴⁾ Motor voltage and current may deviate depending on the type of motor.

Please always note the information on the nameplate

⁵⁾ Authoritative, however, is the oil level at the oil-level glass

⁶⁾ After a complete disassembly


⁷⁾ US models ANSI flanges

⁸⁾ At an operating pressure below < 10⁻¹ mbar (< 0.75 x 10⁻¹ Torr)

Ordering Information

	WA/WAU 251	WA/WAU(H) 501	WA/WAU(H) 1001	WA/WAU(H) 2001
Roots vacuum pump				
RUVAC WA (IEC motor)	Part No. 117 20	Part No. 117 30	Part No. 117 40	Part No. 117 50
RUVAC WA (NEMA motor, US version)	Part No. 917 20	Part No. 917 30	Part No. 917 40	Part No. 917 50
RUVAC WAU (IEC motor)	Part No. 117 21	Part No. 117 31	Part No. 117 41	Part No. 117 51
RUVAC WAU (NEMA motor, US version)	Part No. 917 21	Part No. 917 31	Part No. 917 41	Part No. 917 51
RUVAC WA, without motor	Part No. 117 24	Part No. 117 34	Part No. 117 44	Part No. 112 54
RUVAC WAU, without motor	-	Part No. 155 008	Part No. 112 17	Part No. 113 22
RUVAC WAU(H) (IEC motor), with special ACE vibration absorber	-	Part No. 118 31	Part No. 118 41	Part No. 118 51
RUVAC WS/WSU(H) seal kit	Part No. 194 60	Part No. 194 64	Part No. 194 68	Part No. 194 72
Flange adapter set, consisting of Flange adapter with screws, bolts, washers and nuts for ANSI flange	(3" ANSI)	(3" ANSI)	(4" ANSI)	(6" ANSI)
WA/WS pump	Part No. 200 03 179	Part No. 200 03 179	Part No. 200 03 180	Part No. 200 03 181
WAU/WSU pump	Part No. 200 03 179	Part No. 200 03 179	Part No. 200 03 180	Part No. 200 03 182
Frequency inverter RUVATRONIC (see description in Section "General", paragraph "Accessories")	RT 5/251 Part No. 500 001 381	RT 5/501 Part No. 500 001 382	RT 5/1001 Part No. 500 001 383	RT 5/2001 Part No. 500 001 384

¹⁾ Certified in accordance with ATEX Directive 94/9/EG, Category 3 (inside)

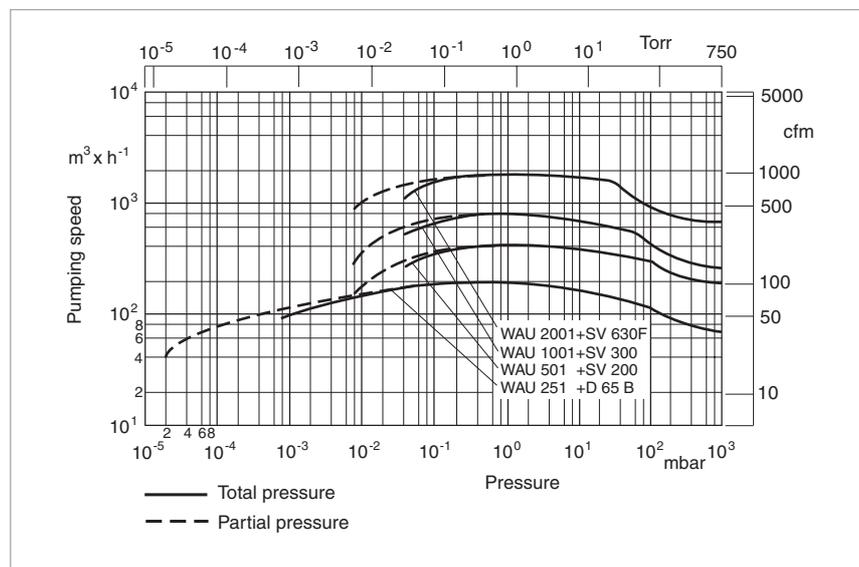

Pumping speed of the RUVAC WA/WAU, 50 Hz

Ordering Information

RUVAC WA/WAU (ATEX-Pumps for 50 Hz-Operation)

251

501


1001

2001

Roots vacuum pump RUVAC WAU ATEX Category 3 (inside) T3/T4	Part No. 155 021	Part No. 155 031	Part No. 155 041	Part No. 155 051
RUVAC WAU ATEX Category 3 (inside) T3/T4 and (outside) T3	Part No. 155 027	Part No. 155 037	Part No. 155 047	Part No. 155 057
RUVAC WAU ATEX Category	Part No. 155 029	Part No. 155 039	Part No. 155 049	Part No. 155 059
RUVAC WA ATEX Category 3 (inside) T3/T4 and (outside) T3	Part No. 155 026	Part No. 155 036	Part No. 155 046	Part No. 155 056
RUVAC WA ATEX Category 3 (inside) T4 and (outside) T4	Part No. 155 028	Part No. 155 038	Part No. 155 048	Part No. 155 058
Further ATEX pumps, Category 2, for example	upon request	upon request	upon request	upon request

Note: EEx de IIC T4 and EEx e T3 compliant motors

RUVAC WS/WSU Roots Vacuum Pumps with Air-Cooled Canned Motors

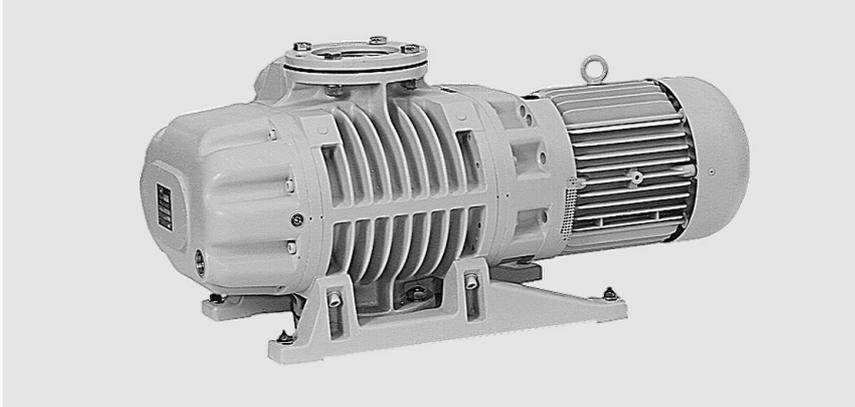

Single-stage Roots vacuum pump RUVAC WSU 1001 shown with ISO-K 100 rotatable flanges

Advantages to the User


- Two series, each with four models
- Highly leak-tight air-cooled pumps driven by a air-cooled canned motor
- Lubricated with mineral oil. RUVAC WS/WSU PFPE with per-fluoropolyether (PFPE)
- WS and WSU PFPE pumps are identical except for the lubricant and the shipping package
- No thermal problems due to the speed independent cooling arrangement using a separately connected fan, thus no thermal problems at low speeds
- Over-temperature switch in the stator coil of the motor
- All elastomer seals made of FPM/ Viton
- Integrated pressure equalization line with differential pressure valve prevents overloading on WSU model
- RUVAC WS 251 to 2001 for use with a frequency inverter for a wide frequency range
- No shaft feedthrough to the atmosphere, thus particularly leak-tight
- Pumping direction may be changed as required

Typical Applications

- For applications which require a high pumping speed at pressures between 10^{-2} and 10^{-4} mbar (0.75×10^{-2} and 0.75×10^{-4} Torr)
- Used where the possibility of contamination due air ingress or pumped media leakage must be avoided
- Suction or pumping of high-purity or radioactive gases
- Is used in clean rooms where the air must not be recirculated by the motor's fan

Supplied Equipment

- The required oil or PFPE filling is included in separate bottle
- If no other type of oil is stated, then mineral oil N 62 is used as standard
- Purged with nitrogen for corrosion protection
- Gasket in the intake flange with integrated dirt sieve

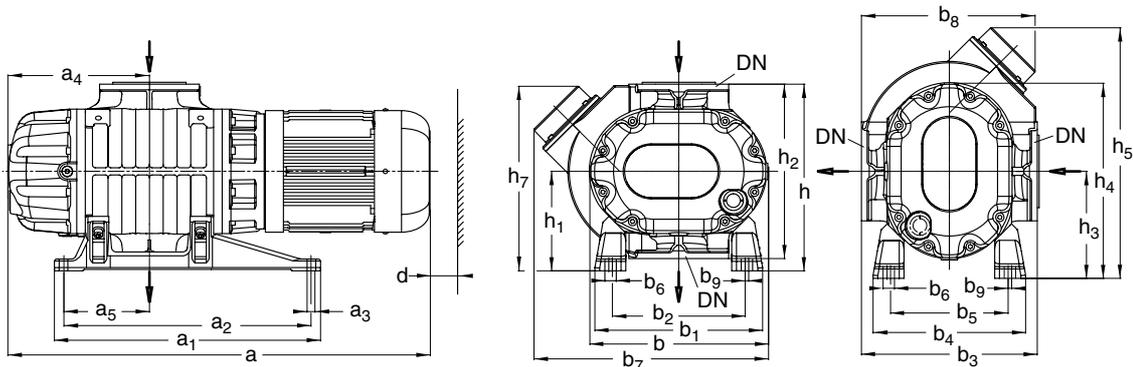

Type		DN/DN1	DN ₁	a	a ₁	a ₂	a ₃	a ₄	a ₅
WS/WSU 251	mm	65	63 ISO-K	694	405	365	14	212	120
	in.			27.32	15.94	14.37	0.55	8.35	4.72
WS/WSU 501	mm	65	63 ISO-K	752	486	450	14	237	155
	in.			29.61	19.13	17.72	0.55	9.33	6.10
WS/WSU 501H	mm	65	63 ISO-K	752	486	450	14	237	155
	in.			29.61	19.13	17.72	0.55	9.33	6.10
WS/WSU 1001	mm	100	100 ISO-K	885	560	520	16,5	298	180
	in.			34.84	22.05	20.47	0.65	11.73	7.09
WS/WSU 1001H	mm	100	100 ISO-K	885	560	520	16,5	298	180
	in.			34.84	22.05	20.47	0.65	11.73	7.09
WS/WSU 2001	mm	150	160 ISO-K	1042	800	740	18	367	220
	in.			41.02	31.50	29.13	0.71	14.45	8.66
WS/WSU 2001H	mm	150	160 ISO-K	1042	800	740	18	367	220
	in.			41.02	31.50	29.13	0.71	14.45	8.66
WS 2001 FC	mm	150	160 ISO-K	1042	800	740	18	367	220
	in.			41.02	31.50	29.13	0.71	14.45	8.66

		b	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇ ¹⁾	b ₈
WS/WSU 251	mm	250	270	210	280	230	170	24	305	285
	in.	9.84	10.63	8.27	11.02	9.06	6.69	0.94	12.01	11.22
WS/WSU 501	mm	310	299	229	320	271	201	24	390	313
	in.	12.20	11.77	9.02	12.60	10.67	7.91	0.94	15.35	12.32
WS/WSU 501H	mm	310	299	229	320	271	201	24	414	330
	in.	12.20	11.77	9.02	12.60	10.67	7.91	0.94	16.30	12.99
WS/WSU 1001	mm	376	352	278	370	320	246	24	494	366
	in.	14.80	13.86	10.94	14.57	12.60	9.69	0.94	19.45	14.41
WS/WSU 1001H	mm	376	352	278	370	320	246	24	524	398
	in.	14.80	13.86	10.94	14.57	12.60	9.69	0.94	20.63	15.67
WS/WSU 2001	mm	463	518	388	460	422	292	24	638	456
	in.	18.23	20.39	15.28	18.11	16.61	11.50	0.94	25.12	17.95
WS/WSU 2001H	mm	463	518	388	460	422	292	24	642	460
	in.	18.23	20.39	15.28	18.11	16.61	11.50	0.94	25.28	18.11
WS 2001 FC	mm	463	518	388	460	422	292	24	-	-
	in.	18.23	20.39	15.28	18.11	16.61	11.50	0.94	-	-

		b ₉	d	h	h ₁	h ₂	h ₃	h ₄	h ₅ ¹⁾	h ₆
WS/WSU 251	mm	7.5	50	300	160	280	180	306	360	307
	in.	0.30	2.00	11.81	6.3	11.02	7.09	12.05	14.17	12.09
WS/WSU 501	mm	7.5	50	340	180	320	194	348	430	332
	in.	0.30	2.00	13.39	7.09	12.60	7.48	13.70	16.93	13.07
WS/WSU 501H	mm	7.5	50	340	180	320	194	348	450	350
	in.	0.30	2.00	13.39	7.09	12.60	7.48	13.70	17.72	13.78
WS/WSU 1001	mm	7.5	50	396	211	370	227	414	532	392
	in.	0.30	2.00	15.59	8.31	14.57	8.94	16.30	20.94	15.43
WS/WSU 1001H	mm	7.5	50	396	211	370	227	414	564	424
	in.	0.30	2.00	15.59	8.31	14.57	8.94	16.30	22.20	16.69
WS/WSU 2001	mm	7.5	50	530	300	460	351	578	760	523
	in.	0.30	2.00	20.87	11.81	18.11	13.82	22.76	29.92	20.59
WS/WSU 2001H	mm	7.5	50	530	300	460	351	578	753	530
	in.	0.30	2.00	20.87	11.81	18.11	13.82	22.76	29.65	20.87
WS 2001 FC	mm	7.5	50	530	300	460	351	578	-	-
	in.	0.30	2.00	20.87	11.81	18.11	13.82	22.76	-	-

¹⁾ For RUVAC WSU only

Outside dimensions +/- 3 mm (0.12 in.)

DN = ND 6 pump flange in accordance with DIN 2501

DN₁ = Collar flange with gasket for connecting ISO-K standard components

Dimensional drawing for the RUVAC WS/WSU pumps

Technical Data

WS/WSU 251

WS/WSU(H) 501

		50 Hz	60 Hz	50 Hz	60 Hz
Nominal pumping speed ¹⁾	m ³ x h ⁻¹ (cfm)	253 (149)	304 (179)	505 (297.4)	606 (357)
Max. pumping speed with backing pump	m ³ x h ⁻¹ (cfm)	210.0 (123.7)	251.0 (148.0)	410.0 (241.0)	530.0 (312.0)
	TRIVAC	D 65 B	D 65 B	–	–
	SOGEVAC	–	–	SV 200	SV 200
Ultimate partial pressure ²⁾	mbar (Torr)	< 2 x 10 ⁻⁵ (< 1.5 x 10 ⁻⁵)	< 2 x 10 ⁻⁵ (< 1.5 x 10 ⁻⁵)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)
Ultimate total pressure ²⁾	mbar (Torr)	< 8 x 10 ⁻⁴ (< 6 x 10 ⁻⁴)	< 8 x 10 ⁻⁴ (< 6 x 10 ⁻⁴)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)
Permissible cut-in pressure ²⁾					
RUVAC WS	mbar (Torr)	90.0 (67.5)	60.0 (45.0)	100.0 (75.0)	80.0 (60.0)
Max. permissible pressure difference during continuous operation ³⁾	mbar (Torr)	80.0 (60.0)	80.0 (60.0)	80.0 (60.0)	80.0 (60.0)
Main supply					
Δ / Y	V	200 / –	200-208 / –	200 / –	200-208 / –
Δ / Y	V	230 / 400	265 / 460	208-265 / 460	265 / 460
Thermal class		F	F	F	F
Motor power, 50/60 Hz	kW (hp)	1.1 (1.5) / 1.4 (1.9)	1.1 (1.5) / 1.4 (1.9)	2.2 (3.0) / 2.4 (3.3)	2.2 (3.0) / 2.4 (3.3)
Nominal speed, approx. (50/60 Hz)	rpm	3000/3600	3000/3600	3000/3600	3000/3600
Max. permissible speed	rpm	6000	6000	6000	6000
Type of protection	IP	20	20	20	20
Oil filling for the bearing chamber ⁴⁾		1. Filling ⁵⁾ / 2. Filling	1. Filling ⁵⁾ / 2. Filling	1. Filling ⁵⁾ / 2. Filling	1. Filling ⁵⁾ / 2. Filling
PFPE					
vertical pumping action, approx.	I (qt)	0.6 (0.63) / 0.55 (0.58)	0.6 (0.63) / 0.55 (0.58)	0.85 (0.9) / 0.75 (0.79)	0.85 (0.9) / 0.75 (0.79)
horizontal pumping action, approx.	I (qt)	0.5 (0.53) / 0.45 (0.48)	0.5 (0.53) / 0.45 (0.48)	0.75 (0.79) / 0.7 (0.74)	0.75 (0.79) / 0.7 (0.74)
other oils					
vertical pumping action, approx.	I (qt)	0.65 (0.69) / 0.6 (0.63)	0.65 (0.69) / 0.6 (0.63)	0.9 (0.95) / 0.8 (0.85)	0.9 (0.95) / 0.8 (0.85)
horizontal pumping action, approx.	I (qt)	0.5 (0.53) / 0.45 (0.48)	0.5 (0.53) / 0.45 (0.48)	0.75 (0.79) / 0.7 (0.74)	0.75 (0.79) / 0.7 (0.74)
Connection flanges	DN	63 ISO-K	63 ISO-K	63 ISO-K	63 ISO-K
Weight WS/WSU	kg (lbs)	90.0/95.0 (198.5/209.5)	90.0/95.0 (198.5/209.5)	130.0/135.0 (286.7/297.7)	130.0/135.0 (286.7/297.7)
Noise level ⁶⁾	dB(A)	< 63	< 63	< 63	< 63

¹⁾ To DIN 28 400 and subsequent numbers

²⁾ With double-stage rotary vane vacuum pump TRIVAC or single-stage rotary vane vacuum pump SOGEVAC
(Type of backing pump look at max. pumping speed)

When using 2-stage backing pumps the ultimate pressures will be correspondingly lower

³⁾ Applicable for ratio up to 1 : 10 between backing pump and Roots vacuum pump at 3000 rpm

⁴⁾ Authoritative, however, is the oil level at the oil-level glass

⁵⁾ After a complete disassembly

⁶⁾ At an operating pressure < 10⁻¹ mbar (< 0.75 x 10⁻¹ Torr)

Technical Data

RUVAC WS/WSU (H)

	1001		2001		RUVAC WS FC 2001 ¹⁾	
	50 Hz	60 Hz	50 Hz	60 Hz	until 100 Hz	
					ANDEROL	PFPE

Nominal pumping speed ²⁾	m ³ x h ⁻¹ (cfm)	(2415)1000 (589)	1200 (707)	2050 (1207.5)	2460 (1449)	4100 (2415)	4100
Max. pumping speed with backing pump	m ³ x h ⁻¹ (cfm) SOGEVAC SCREWLINE	800 (470) SV 300 –	1000 (588) SV 300 –	1850 (1089) SV 630 F –	2100 (1236) SV 630 F –	3400 (2003) – SP 630	3400 (2003) – SP 630
Ultimate partial pressure ³⁾	mbar (Torr)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)
Ultimate total pressure ³⁾	mbar (Torr)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)
Possible cut-in pressure ³⁾ RUVAC WS	mbar (Torr)	60.0 (45.0)	45.0 (33.5)	30.0 (22.5)	25.0 (18.5)	< 10 (< 7.5)	< 10 (< 7.5)
Max. permissible pressure difference during continuous operation ⁴⁾	mbar (Torr)	80.0 (60.0)	80.0 (60.0)	50.0 (37.5)	50.0 (37.5)	40.0 (30.0)	35.0 (26.0)
Main supply							
Δ / Y	V	200 / –	200-208 / –	200 / –	200-208 / –	400	400
Δ / Y	V	230 / 400	265 / 460	230 / 400	265 / 460	400	400
Thermal class		F	F	F	F	F	F
Motor power, 50/60 Hz	kW (hp)	4.0/4.4 (5.4/6.0)	4.0/4.4 (5.4/6.0)	7.5 / 8.5 (10.0/11.6)	7.5/8.5 (10.0/11.6)	7.5 / 8.5 (10.0/11.6)	7.5 / 8.5 (10.0/11.6)
Nominal speed, approx. (50/60 Hz)	rpm	3000/3600	3000/3600	3000/3600	3000/3600	3000	3000
Max. permissible speed	rpm	6000	6000	4200 ⁵⁾	4200 ⁵⁾	6000	6000
Type of protection to EN 60 529	IP	20	20	20	20	20	20
Oil filling for the bearing chamber ⁶⁾ PFPE		1. Filling ⁷⁾ / 2. Filling					
vertical pumping action, approx.	l (qt)	1.95 / 1.75 (2.06 / 1.85)	1.95 / 1.75 (2.06 / 1.85)	3.0 / 2.7 (3.17 / 2.85)	3.0 / 2.7 (3.17 / 2.85)	–	3.0 / 2.7
horizontal pumping action, approx.	l (qt)	1.2 / 1.1 (1.27 / 1.16)	1.2 / 1.1 (1.27 / 1.16)	2.1 / 1.9 (2.22 / 2.00)	2.1 / 1.9 (2.22 / 2.00)	–	1.8 / 1.6 (1.9 / 1.7)
other oils							
vertical pumping action, approx.	l (qt)	2.0 / 1.8 2.11 / 1.90	2.0 / 1.8 2.11 / 1.90	3.85 / 3.6 (4.07 / 3.81)	3.85 / 3.6 (4.07 / 3.81)	3.3 / 3.0 (3.49 / 3.17)	–
horizontal pumping action, approx.	l (qt)	1.2 / 1.1 (1.27 / 1.16)	1.2 / 1.1 (1.27 / 1.16)	2.6 / 2.4 (2.75 / 2.54)	2.6 / 2.4 (2.75 / 2.54)	2.2 / 2.0 (2.33 / 2.11)	–
Connection flanges	DN	100 ISO-K	100 ISO-K	160 ISO-K	160 ISO-K	160 ISO-K	160 ISO-K
Weight WS/WSU	kg (lbs)	228.0/233.0 (502.7/513.8)	228.0/233.0 (502.7/513.8)	458.0/465.0 (1009.9/1025.3)	458.0/465.0 (1009.9/1025.3)	465.0 (1025.3)	465.0 (1025.3)
Noise level ⁸⁾	dB(A)	< 68	< 68	< 72	< 72	< 72	< 72

¹⁾ FC = frequency controlled motor, max. operating pressure of 1013 mbar (760 Torr)

²⁾ To DIN 28 400 and subsequent numbers

³⁾ With single-stage rotary vane vacuum pump SOGEVAC or dry compressing vacuum pump SCREWLINE
(Type of backing pump look at max. pumping speed)

When using 2-stage backing pumps the ultimate pressures will be correspondingly lower

⁴⁾ Applicable for ratio up to 1 : 10 between backing pump and Roots vacuum pump at 3000 rpm

⁵⁾ Also 6000 rpm upon order

⁶⁾ Authoritative, however, is the oil level at the oil-level glass

⁷⁾ After a complete disassembly


⁸⁾ At an operating pressure < 10⁻¹ mbar (< 0.75 x 10⁻¹ Torr)

Ordering Information

WS/WSU WS/WSU(H) WS/WSU(H) WS/WSU(H) WS FC¹⁾

	251	501	1001	2001	2001
Roots vacuum pump					
RUVAC WS	Part No. 117 22	Part No. 117 32	Part No. 117 42	Part No. 117 52	-
RUVAC WSU	Part No. 117 23	Part No. 117 33	Part No. 117 43	Part No. 117 53	-
RUVAC WS PFPE	Part No. 117 27	Part No. 117 37	Part No. 117 47	Part No. 117 57	-
RUVAC WSU PFPE	Part No. 117 28	Part No. 117 38	Part No. 200 00 763	Part No. 200 03 123	-
RUVAC WSU PFPE (US version)	-	-	Part No. 917 48	-	-
RUVAC WS 2001, ANDEROL 555 (max. 100 Hz)	-	-	-	Part No. 167 007	-
RUVAC WS 2001, PFPE (max. 100 Hz)	-	-	-	Part No. 150 95	-
RUVAC WSU 2001, ANDEROL 555 (max. 100 Hz)	-	-	-	Part No. 150 96	-
RUVAC WS FC, ANDEROL 555	-	-	-	-	Part No. 155 020
RUVAC WS FC, PFPE	-	-	-	-	Part No. 155 030
RUVAC WSU(H) with special ACE vibration absorber	-	118 33	118 43	Part No. 118 53	-
RUVAC WS/WSU(H) seal kit	Part No. 194 62	Kat.-Nr 194 66	Part No. 194 70	Part No. 194 74	Part No. 194 74
Flange adapter set, consisting of flange adapter with screws, bolts, washers and nuts for ANSI flange	(3" ANSI) Part No.	(3" ANSI) Part No.	(4" ANSI) Part No.	(6" ANSI) Part No.	(6" ANSI) Part No.
WA/WS pump	200 03 179	200 03 179	200 03 180	200 03 181	200 03 181
WAU/WSU pump	200 03 179	200 03 179	200 03 180	200 03 182	-
Frequency inverter RUVATRONIC (see description in Section "General", paragraph "Accessories")	RT 5/251 Part No. 500 001 381	RT 5/501 Part No. 500 001 382	RT 5/1001 Part No. 500 001 383	RT 5/2001 Part No. 500 001 384	-

¹⁾ FC = Frequency Controlled Motor

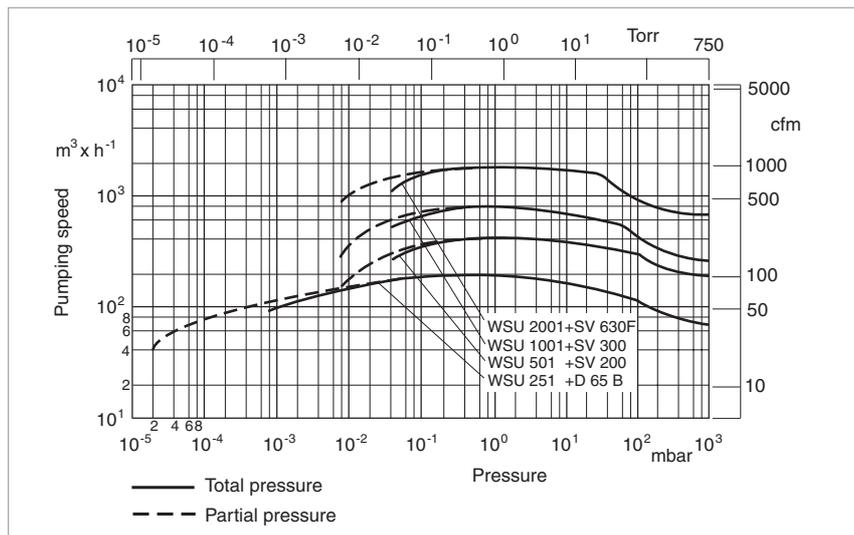

Pumping speed of the RUVAC WS/WSU, 50 Hz

RUVAC WS/WSU (W) PFPE Roots Vacuum Pumps with Water-Cooled Canned Motors



Single-stage Roots vacuum pump RUVAC WS 501 W shown with ISO-K 63 rotatable flanges

Advantages to the User


- Two series, each with four models
- Highly leak-tight air-cooled pumps driven by a water-cooled canned motor
- RUVAC WS/WSU(W) PFPE lubricated with perfluoropolyether (PFPE)
- WS and WS PFPE pumps are identical except for the lubricant and the shipping package
- No thermal problems due to the speed independent cooling arrangement using a separately connected fan, thus no thermal problems at low speeds
- Over-temperature switch in the stator coil of the motor
- All elastomer seals made of FPM/Viton
- Integrated pressure equalization line with differential pressure valve prevents overloading on WSU model
- RUVAC WS 251 to 2001 for use with a frequency inverter for a wide frequency range
- No shaft feedthrough to the atmosphere, thus particularly leaktight
- Pumping direction may be changed as required

Typical Applications

- For applications which require a high pumping speed at pressures between 10^{-2} and 10^{-4} mbar (0.75×10^{-2} and 0.75×10^{-4} Torr)
- Used where the possibility of contamination due air ingress or pumped media leakage must be avoided
- Suction or pumping of high-purity or radioactive gases
- Is used in clean rooms where the air must not be recirculated by the motor's fan

Supplied Equipment

- The required oil or PFPE filling is included in separate bottle (exceptions are marked)
- PFPE is used as standard
- Purged with nitrogen for corrosion protection
- Gasket in the intake flange with integrated dirt sieve

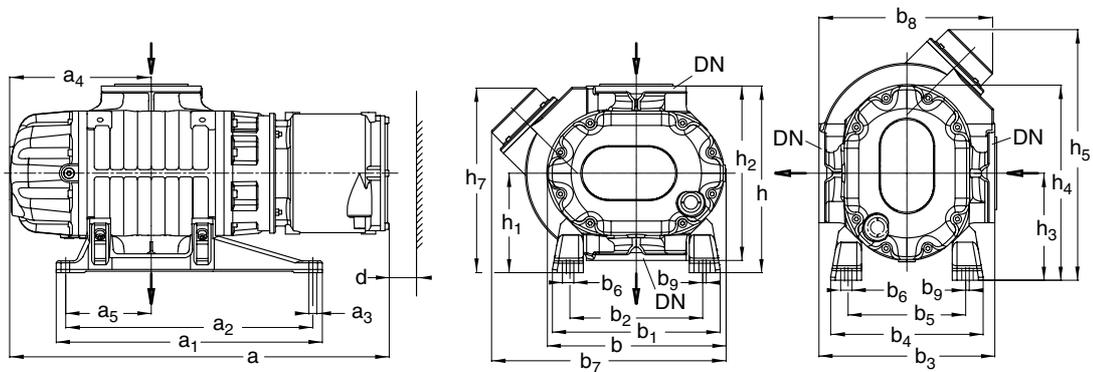

Type		DN	DN ₁	a	a ₁	a ₂	a ₃	a ₄	a ₅	
WS 501 W	mm	63 ISO-K	63 ISO-K	738	496	450	14	237	155	
	in.			29.06	19.53	17.72	0.55	9.33	6.10	
WS/WSU 1001 W	mm	100 ISO-K	100 ISO-K	793	560	520	16,5	298	180	
	in.			31.22	22.05	20.47	0.65	11.73	7.09	
WS/WSU 2001 W	mm	160 ISO-K	160 ISO-K	958	800	740	18	367	220	
	in.			437.72	31.50	29.13	0.71	14.45	8.66	
<hr/>										
		b	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇ ¹⁾	b ₈
WS 501 W	mm	310	299	229	305	271	201	24	–	–
	in.	12.20	11.77	9.02	12.01	10.67	7.91	0.94	–	–
WS/WSU 1001 W	mm	372	352	278	370	320	246	24	494	366
	in.	14.65	13.86	10.94	14.57	12.60	9.69	0.94	19.45	14.41
WS/WSU 2001 W	mm	457	518	388	460	422	292	24	638	456
	in.	17.99	20.39	15.28	18.11	16.61	11.50	0.94	25.12	17.95
<hr/>										
		b ₉	d	h	h ₁	h ₂	h ₃	h ₄	h ₅ ¹⁾	h ₆
WS 501 W	mm	7.5	50	331	180	305	194	348	–	–
	in.	0.30	2.00	13.03	7.09	12.01	7.64	13.70	–	–
WS/WSU 1001 W	mm	7.5	50	396	211	370	227	414	532	392
	in.	0.30	2.00	15.59	8.31	14.57	8.94	16.30	20.94	15.43
WS/WSU 2001 W	mm	7.5	50	530	300	460	351	578	760	523
	in.	0.30	2.00	20.87	11.81	18.11	13.82	22.76	29.92	20.59

¹⁾ For RUVAC WSU ... W only

Outside dimensions +/- 3 mm (0.12 in.)

DN = ND 6 pump flange in accordance with DIN 2501

DN₁ = Collar flange with gasket for connecting ISO-K standard components

Dimensional drawing for the RUVAC WS/WSU(W) PFPE pumps

Technical Data

RUVAC WS 501 W

		50 Hz	60 Hz
Nominal pumping speed ¹⁾	m ³ x h ⁻¹ (cfm)	505.0 (297.4)	606.0 (357.0)
Max. pumping speed with backing pump	m ³ x h ⁻¹ (cfm) SOGEVAC	410 (241) SV 200	530 (312) SV 200
Ultimate partial pressure ²⁾	mbar (Torr)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)
Ultimate total pressure ²⁾	mbar (Torr)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)
Permissible cut-in pressure ²⁾ RUVAC WS	mbar (Torr)	100 (75)	80 (60)
Max. permissible pressure difference during continuous operation ³⁾	mbar (Torr)	80 (60)	80 (60)
Main supply			
Δ / Y	V	200 / –	200-208 / –
Δ / Y	V	230 / 400	265 / 460
Thermal class		F	F
Motor power, 50/60 Hz	kW (hp)	2.2 (3.0) / 2.4 (3.3)	2.2 (3.0) / 2.4 (3.3)
Nominal speed, approx. (50/60 Hz)	rpm	3000/3600	3000/3600
Max. permissible speed	rpm	6000	6000
Type of protection	IP	40	40
Cooling water connection with inside thread		1/4" 18 NPT	1/4" 18 NPT
Cooling water consumption, min. at inlet temperature, max. 25 °C (77 °F)	l x h ⁻¹	200	200
Max. permissible cooling water pressure	bar	6	6
Oil filling for the bearing chamber ⁴⁾ PFPE vertical pumping action, approx.	l (qt)	1. Filling ⁵⁾ / 2. Filling 0.85 (0.9) / 0.75 (0.79)	1. Filling ⁵⁾ / 2. Filling 0.85 (0.9) / 0.75 (0.79)
horizontal pumping action, approx.	l (qt)	0.75 (0.79) / 0.7 (0.74)	0.75 (0.79) / 0.7 (0.74)
Connection flanges	DN	63 ISO-K	63 ISO-K
Weight WS	kg (lbs)	130.0 (286.7)	130.0 (286.7)
Noise level ⁶⁾	dB(A)	< 63	< 63

¹⁾ To DIN 28 400 and subsequent numbers

²⁾ With single-stage rotary vane vacuum pump SOGEVAC
(Type of backing pump look at max. pumping speed).

When using 2-stage backing pumps the ultimate pressures will be correspondingly lower

³⁾ Applicable for ratio up to 1 : 10 between backing pump and Roots vacuum pump at 3000 rpm

⁴⁾ Authoritative, however, is the oil level at the oil-level glass

⁵⁾ After a complete disassembly

⁶⁾ At an operating pressure < 10⁻¹ mbar (< 0.75 x 10⁻¹ Torr)

Technical Data

WS/WSU 1001 W

WS/WSU 2001 W

		50 Hz	60 Hz	50 Hz	60 Hz
Nominal pumping speed ¹⁾	m ³ x h ⁻¹ (cfm)	1000 (589)	1200 (707)	2050 (1207.5)	2460 (1449)
Max. pumping speed with backing pump	m ³ x h ⁻¹ (cfm) SCREWLINE	830 (489) SP250	1000 (588) SP250	1780 (1044) SP630	2080 (1224) SP630
Ultimate total pressure ²⁾	mbar (Torr)	< 1 x 10 ⁻³ (< 7.5 x 10 ⁻⁴)	< 1 x 10 ⁻³ (< 7.5 x 10 ⁻⁴)	< 1 x 10 ⁻³ (< 7.5 x 10 ⁻⁴)	< 1 x 10 ⁻³ (< 7.5 x 10 ⁻⁴)
Permissible cut-in pressure ²⁾					
RUVAC WS	mbar (Torr)	50.0 (37.5)	20.0 (15.0)	23.0 (17.25)	18.0 (13.5)
Max. permissible pressure difference during continuous operation ³⁾	mbar (Torr)	80.0 (60.0)	50.0 (37.5)	50.0 (37.5)	50.0 (37.5)
Main supply					
Δ / Y	V	200 / –	200-208 / –	200 / –	200-208 / –
Δ / Y	V	230 / 400	265 / 460	230 / 400	265 / 460
Thermal class		F	F	F	F
Motor power, 50/60 Hz	kW (hp)	4.0/4.4 (5.4/6.0)	4.0/4.4 (5.4/6.0)	7.5 / 8.5 (10.2/11.6)	7.5/8.5 (10.2/11.6)
Nominal speed, approx. (50/60 Hz)	rpm	3000/3600	3000/3600	3000/3600	3000/3600
Max. permissible speed	rpm	6000	6000	4200 ⁴⁾	4200 ⁴⁾
Type of protection	IP	54	54	54	54
Cooling water connection with inside thread		2x G 3/8"	2x G 3/8"	2x G 1/2"	2x G 1/2"
Cooling water consumption, min. at inlet temperature, max. 25 °C (77 °F)	l x h ⁻¹	90	90	150	150
Max. permissible cooling water pressure	bar	7	7	7	7
Oil filling for the bearing chamber ⁵⁾		1. Filling ⁶⁾ / 2. Filling			
PFPE vertical pumping action, approx.	l (qt)	1.95 / 1.75 (2.06 / 1.85)	1.95 / 1.75 (2.06 / 1.85)	3.0 / 2.7 (3.17 / 2.85)	3.0 / 2.7 (3.17 / 2.85)
PFPE horizontal pumping action, approx.	l (qt)	1.2 / 1.1 (1.27 / 1.16)	1.2 / 1.1 (1.27 / 1.16)	2.1 / 1.9 (2.22 / 2.00)	2.1 / 1.9 (2.22 / 2.00)
Connection flanges	DN	100 ISO-K	100 ISO-K	160 ISO-K	160 ISO-K
Weight WS/WSU	kg (lbs)	228.0/233.0 (502.7/513.8)	228.0/233.0 (502.7/513.8)	458.0/465.0 (1009.9/1025.3)	458.0/465.0 (1009.9/1025.3)
Noise level ⁷⁾	dB(A)	< 68	< 68	< 72	< 72

¹⁾ To DIN 28 400 and subsequent numbers

²⁾ With dry compressing vacuum pump SCREWLINE
(Type of backing pump look at max. pumping speed).

When using 2-stage backing pumps the ultimate pressures will be correspondingly lower

³⁾ Applicable for ratio up to 1 : 10 between backing pump and Roots vacuum pump at 3000 rpm

⁴⁾ Also 6000 rpm upon order

⁵⁾ Authoritative, however, is the oil level at the oil-level glass

⁶⁾ After a complete disassembly


⁷⁾ At an operating pressure < 10⁻¹ mbar (< 0.75 x 10⁻¹ Torr)

Ordering Information

RUVAC WS/WSU


	501 W	1001 W	2001 W
Roots vacuum pump RUVAC WS PFPE RUVAC WSU PFPE	Part No. 128 60 -	Part No. 155 042 ¹⁾ Part No. 155 043 ¹⁾	Part No. 155 052 ¹⁾ Part No. 155 053 ¹⁾
RUVAC WS/WSU(H) seal kit	Part No. 194 66	Part No. 194 70	Part No. 194 74
Flange adapter set, consisting of flange adapter with screws, bolts, washers and nuts for ANSI flange	(3" ANSI) Part No.	(4" ANSI) Part No.	(6" ANSI) Part No.
WA/WS pump	200 03 179	200 03 180	200 03 181
WAU/WSU pump	-	Part No. 200 03 180	Part No. 200 03 182
Frequency inverter RUVATRONIC (see description in Section "General", paragraph "Accessories")	RT 5/501 Part No. 500 001 382	RT 5/1001 Part No. 500 001 383	RT 5/2001 Part No. 500 001 384

¹⁾ Prepared for operation with PFPE, without PFPE filling

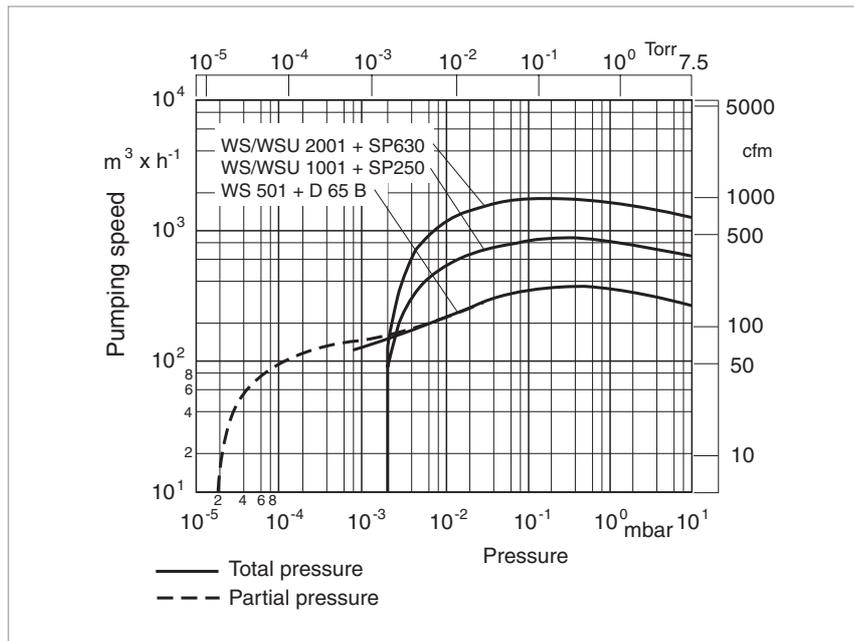

Pumping speed of the RUVAC WS/WSU (W) PFPE, 50 Hz

RUVAC WSLF Roots Vacuum Pumps for Laser Gas Systems

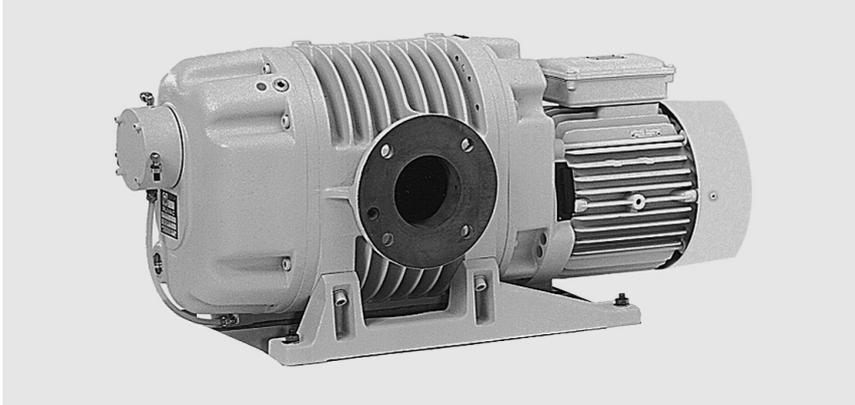

RUVAC WSLF 1001 LF Roots vacuum pump

Roots vacuum pumps driven by canned motors are available for gas laser systems.

Advantages to the User

- A gas mixture of helium, nitrogen and carbon monoxide is continuously circulated at a reduced system pressure
- High pumping speed from a small, quiet running pump
- Operation with a frequency inverter is possible
- Nickel-plated pump chamber surfaces
- Through an additional vacuum pump the bearing chambers may be evacuated to a pressure lower than the pressure within the pumping chamber of the RUVAC
- Water-cooled oil separating system
- Integrated oil separating system for extended maintenance intervals

Typical Applications


- Processing of ferrous and non-ferrous materials like welding, cutting and surface refinement

Technical Note

- The gas circulation system must be very clean and entirely free of hydrocarbons

Supplied Equipment

- Horizontal pumping action as standard
- With oil pressure switch and oil drain facility
- The required oil filling is included separately (special oil ANDEROL® 2100 HTCL)
- Purged with nitrogen for corrosion protection

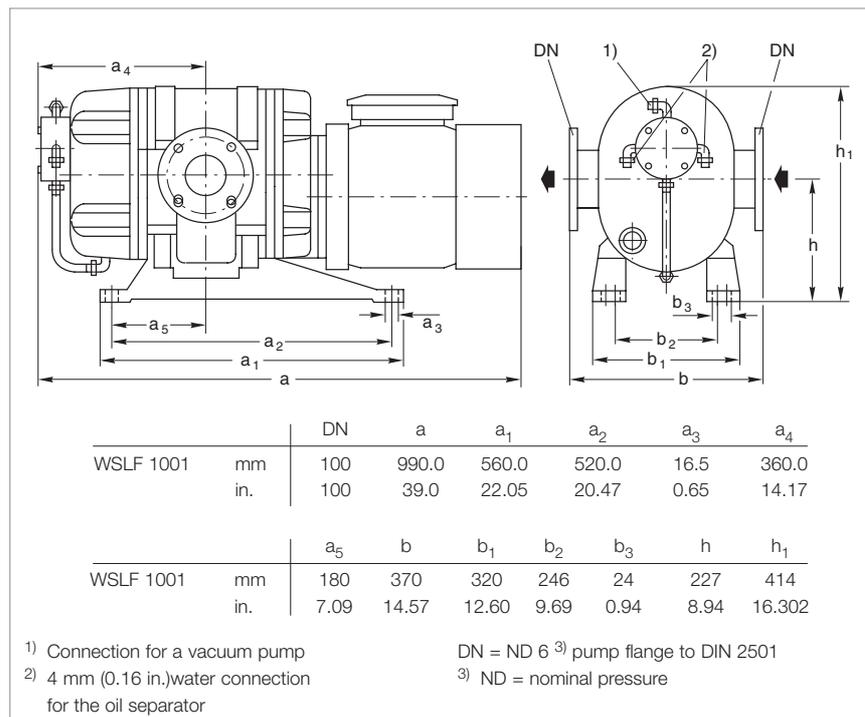

Dimensional drawing for the RUVAC WSLF pumps

Technical Data**WSLF 1001**

		50 Hz	60 Hz
Nominal pumping speed ¹⁾	m ³ x h ⁻¹ (cfm)	1000 (589)	1200 (707)
Max. permissible pressure difference during continuous operation	mbar (Torr)	80 (60)	80 (60)
Main supply Δ / Y	V	200-230 / 400	200-265 / 460
Motor power	kW (hp)	7.5 (10.2)	8.5 (11.6)
Nominal speed	rpm	3000	3600
Max. permissible speed	rpm	6000	6000
Type of protection	IP	20	20
Oil filling of the bearing chambers	l (qt)	1.2 (1.27)	1.2 (1.27)
Connection flange DIN 2501	DN	100	100
Weight	kg (lbs)	275 (606.4)	275 (606.4)
Cooling water pressure	bar (psi)	1 - 5 (14.5 - 72.5)	1 - 5 (14.5 - 72.5)
Cooling water throughput	l x h ⁻¹ (cfm)	200.0 (0.9)	200.0 (0.9)
Hose connection for hose		6 x 1	6 x 1

Ordering Information**WSLF 1001**

RUVAC WSLF Roots vacuum pump RUVAC WSLF 1001	Part No. 117 94
RUVAC WSLF seal kit	Part No. 194 70

¹⁾ To DIN 28 400 and subsequent numbers

RUVAC RA Roots Vacuum Pumps with Flange-Mounted Motors



RUVAC RA 5001 single-stage Roots vacuum pump

Roots vacuum pumps offering a high pumping speed.

Advantages to the User

- Oil immersed radial shaft seals made of FPM for sealing against the atmosphere
- Use of universal IEC motors (50/60 Hz)
- The motors fulfil in Europe (50 Hz) the efficiency requirements in accordance with EFF1
- In the USA (60 Hz) the motors are UL approved and fulfil the efficiency requirements in accordance with EPAC
- If required with external pressure equalisation line and differential pressure valve so that the pump may be switched on jointly with the backing pump at atmospheric pressure
- Motors can easily be exchanged for special voltage motors. Explosion protected motors and motors for special main frequencies upon request
- Over-temperature switch in the stator coil of the motor
- Rugged dry compressing vacuum pump
- Most reliable even under rough operating conditions
- ATEX versions compliant to 94/9/EC possible

Typical Applications


- Large vacuum systems like sintering and annealing furnaces which require multi-stage pumpsets
- In large vacuum rectification systems Roots vacuum pumps with postcondensers for compressing of vapors

Custom Pumps


- If required the RA pumps are also available as C versions (chemical versions)
- Pumps made of special materials may be specified as well as pressure burst resistant pumps
- Custom designed pumps for pumping speeds of 250 m³/h to 2000 m³/h (147.3 to 1178 cfm)

Technical Note

For operation ordering of oil is necessary (see section "Miscellaneous")

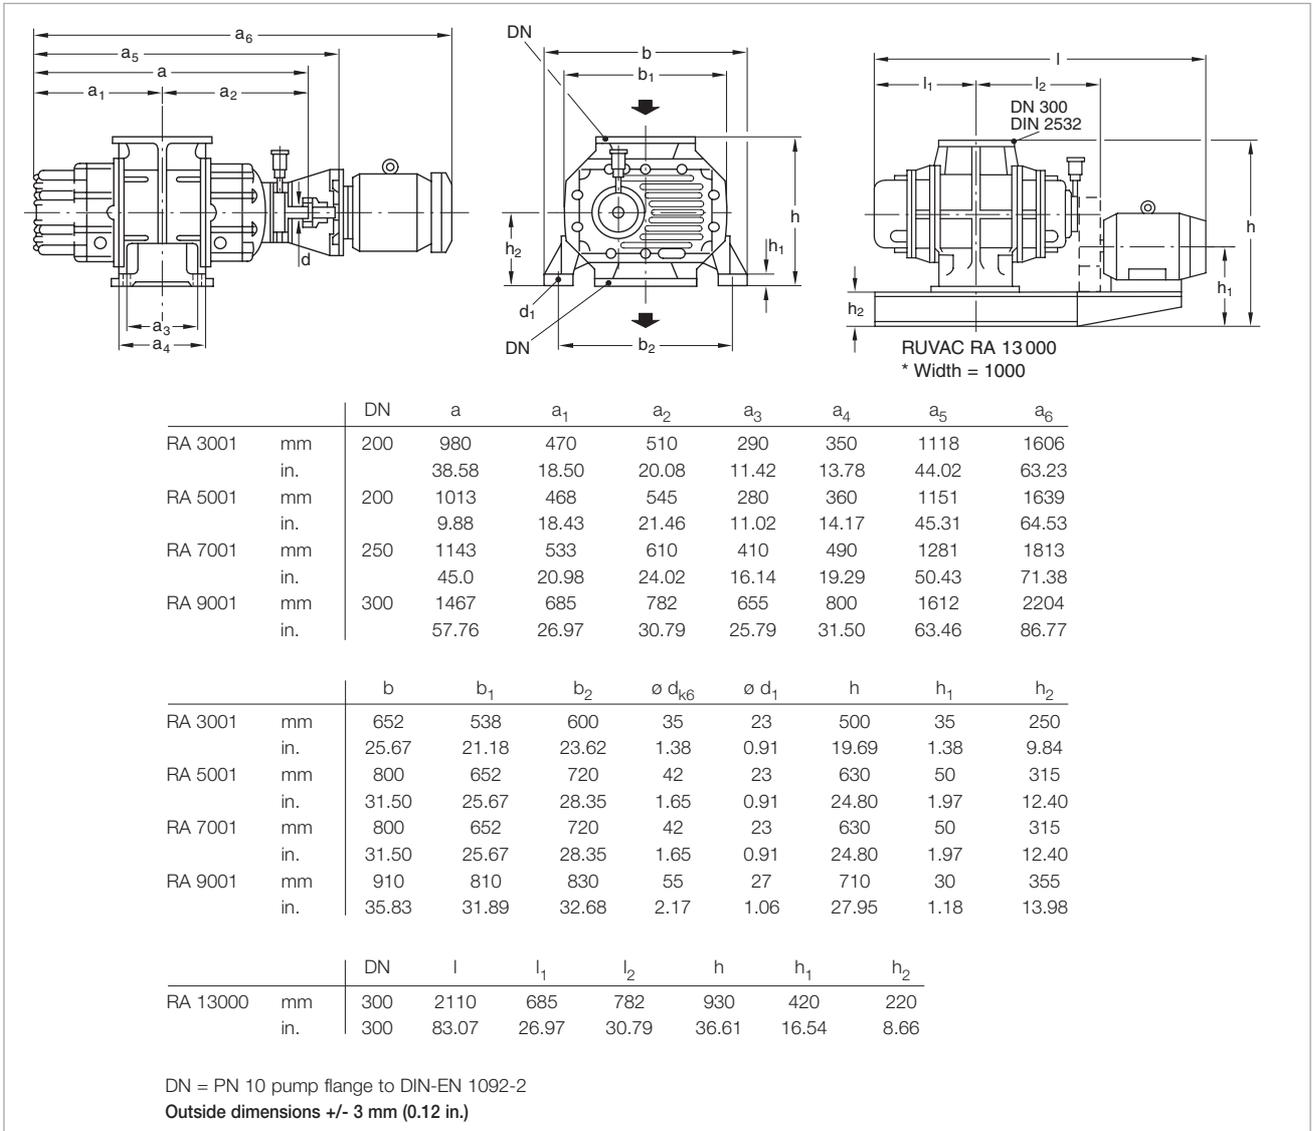

Dimensional drawing for the RUVAC RA pumps

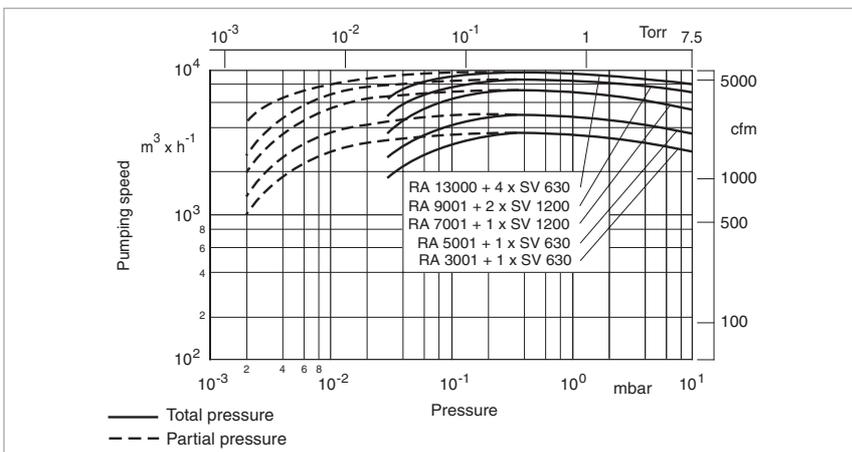

Pumping speed curves for the RUVAC RA, 50 Hz

Technical Data

RA 3001

RA 5001

		50 Hz	60 Hz	50 Hz	60 Hz
Nominal pumping speed ¹⁾	m ³ x h ⁻¹ (cfm)	3845 (2264)	4625 (2724)	5450 (3210)	6560 (3864)
Max. pumping speed with backing pump	m ³ x h ⁻¹ (cfm) SOGEVAC	3200 (1883) SV 630 F	3850 (2266) SV 630 F	4300 (2531) SV 630 F	5200 (3061) SV 630 F
Ultimate partial pressure ²⁾	mbar (Torr)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)
Ultimate total pressure ²⁾	mbar (Torr)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)
Max. permissible pressure difference during continuous operation ³⁾					
	mbar (Torr)	53.0 (39.8)	53.0 (39.8)	53.0 (39.8)	53.0 (39.8)
for < 3 min.	mbar (Torr)	93.0 (69.8)	93.0 (69.8)	93.0 (69.8)	93.0 (69.8)
Main supply	Δ / Y	V			
	Δ / Y	V	380 / 660	440 / -	380 / 660
	Δ / Y	V	400 / 690	460 / -	400 / 690
	Δ / Y	V	415 / -	-	415 / -
Thermal class		F	F	F	F
Motor power	kW (hp)	11.0 (15.0)	12.5 (17.0)	15.0 (20.4)	17.0 (23.1)
Nominal speed, 50 Hz	rpm	3000/3600	3000/3600	3000/3600	3000/3600
Max. permissible speed	rpm	3600	3600	3600	3600
Type of protection	IP	55	55	55	55
Oil filling, approx.					
vertical pumping action	l (qt)	7.0 (7.4)	7.0 (7.4)	12.0 (12.7)	12.0 (12.7)
horizontal pumping action	l (qt)	3.5 (3.7)	3.5 (3.7)	5.4 (5.7)	5.4 (5.7)
Connection flange					
suction side ^{4, 5)}	DN	200	200	200	200
pressure side ^{4, 5)}	DN	200	200	200	200
Adapter flange package					
suction side	DN	250 ISO-K	250 ISO-K	250 ISO-K	250 ISO-K
pressure side	DN	160 ISO-K	160 ISO-K	160 ISO-K	160 ISO-K
Weight complete, approx.	kg (lbs)	580.0 (1278.9)	580.0 (1278.9)	770.0 (1697.9)	770.0 (1697.9)

Ordering Information

RA 3001

RA 5001

50 / 60 Hz

50 / 60 Hz

Roots vacuum pump RUVAC RA with motor, coupling and lantern ⁶⁾ RUVAC RA, ATEX version	Part No. 119 50 upon request	Part No. 119 53 upon request
Adapter flange package for suction and pressure side, including centering ring with integrated dirt sieve in the intake flange	Part No. 200 14 472	Part No. 200 14 472
Frequency inverter RUVATRONIC (see description in Section "General", paragraph "Accessories")	RT 5/3001 Part No. 500 001 385	RT 5/5001 Part No. 500 001 386

¹⁾ To DIN 28 400 and subsequent numbers

²⁾ With single-stage rotary vane vacuum pumps SOGEVAC

³⁾ Valid for a ratio of 1 : 5 between backing pump and Roots vacuum pump

⁴⁾ According to DIN 2532

⁵⁾ Without adapter flange to ISO-K flange

⁶⁾ Without oil filling

Technical Data

		RA 7001		RA 9001		RA 13000
		50 Hz	60 Hz	50 Hz	60 Hz	50 Hz
Nominal pumping speed ¹⁾	m ³ x h ⁻¹ (cfm)	7337 (4321)	8819 (5194)	9567 (5635)	11484 (6762)	13000 (7657)
Max. pumping speed with backing pump or	m ³ x h ⁻¹ (cfm)	6100 (3590)	7200 (4238)	7500 (4414)	8900 (5239)	10000 (5890)
	SOGEVAC m ³ x h ⁻¹ (cfm)	SV 1200 –	SV 1200 –	2 x SV 1200 –	2 x SV 1200 –	– 2500 (1473)
Ultimate partial pressure ²⁾	mbar (Torr)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 8 x 10 ⁻³ (< 6 x 10 ⁻³)	< 1 x 10 ⁻² (< 7.5 x 10 ⁻³)	< 1 x 10 ⁻² (< 7.5 x 10 ⁻³)	< 1 x 10 ⁻² (< 7.5 x 10 ⁻³)
Ultimate total pressure ²⁾	mbar (Torr)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 4 x 10 ⁻² (< 3 x 10 ⁻²)	< 5 x 10 ⁻² (< 3.8 x 10 ⁻²)	< 5 x 10 ⁻² (< 3.8 x 10 ⁻²)	< 5 x 10 ⁻² (< 3.8 x 10 ⁻²)
Max. permissible pressure difference during continuous operation ³⁾ for < 3 min.	mbar (Torr)	53.0 (39.8)	53.0 (39.8)	66.0 (49.5)	66.0 (49.5)	53.0 (39.8)
	mbar (Torr)	93.0 (69.8)	93.0 (69.8)	133.0 (99.8)	133.0 (99.8)	93.0 (69.8)
Main supply Δ / Y	V	380 / 660	440 / –	380 / 660	440 / –	380 / 660
	V	400 / 690	460 / –	400 / 690	460 / –	400 / 690
	V	415 / –	–	415 / –	–	415 / –
Thermal class		F	F	F	F	F
Motor power	kW (hp)	18.5 (25.1)	21.0 (28.6)	22.0 (30.0)	25.0 (34.0)	30.0 (40.8)
Nominal speed, 50 Hz	rpm	3000/3600	3000/3600	1500/1800	1500/1800	2000
Max. permissible speed	rpm	3600	3600	1800	1800	2000
Type of protection	IP	55	55	55	55	55
Oil filling, approx.	vertical pumping action	l (qt)	12.0 (12.7)	12.0 (12.7)	11.0 (11.6)	11.0 (11.6)
	horizontal pumping action	l (qt)	5.4 (5.7)	5.4 (5.7)	7.6 (8.0)	7.6 (8.0)
Connection flange	suction side ^{4, 5)}	DN	250	250	300	300
	pressure side ^{4, 5)}	DN	250	250	300	300
Adapter flange package	suction side	DN	250 ISO-K	250 ISO-K	320 ISO-K	320 ISO-K
	pressure side	DN	250 ISO-K	250 ISO-K	250 ISO-K	250 ISO-K
Weight complete, approx.	kg (lbs)	840 (1852.2)	840 (1852.2)	1400 (3087.0)	1400 (3087.0)	upon request

Ordering Information

	RA 7001	RA 9001	RA 13000
	50 / 60 Hz	50 / 60 Hz	50 Hz
Roots vacuum pump RUVAC RA with motor, coupling and lantern ⁶⁾ RUVAC RA, ATEX version	Part No. 119 60 upon request	Part No. 119 63 upon request	upon request –
Frequency inverter RUVATRONIC (see description in Section “General”, paragraph “Accessories”)	RT 5/7001 Part No. 500 001 387	RT 5/9001 Part No. 500 001 388	RT 5/13000 Part No. 500 001 389

¹⁾ To DIN 28 400 and subsequent numbers

²⁾ With single-stage rotary vane vacuum pumps SOGEVAC

³⁾ Valid for a ratio of 1 : 5 between backing pump and Roots vacuum pump

⁴⁾ According to DIN 2532

⁵⁾ Without adapter flange to ISO-K flange

⁶⁾ Without oil filling

Accessories

Pressure Switches

The RUVAC vacuum pumps may be switched on and off automatically through a pressure switch driven by a SV 110 switching amplifier and a contactor.

The pressure switch may be installed in the intake of the RUVAC using a screw-in adaptor, an elbow and two centering and two clamping rings.

Upon request the pressure switch may be set by Oerlikon Leybold Vacuum to a fixed value. Please state this pressure value in your order.

Ordering Information

Pressure Switches

Pressure switch PS 115, adjustable setting Pressure switch setting	Part No. 160 04 Part No. 160 05
Accessories for fitting the PS 115 pressure switch Screw-in adaptor DN 16 ISO-KF, M 16 x 1.5 mm (0.06 in.) Elbow DN 16 KF Centering ring DN 16 KF (2 are required) Clamping ring DN 16 KF (2 are required)	Part No. 168 40 Part No. 184 36 Part No. 183 26 Part No. 183 41
SV 110 switching amplifier (for PS 114/115)	Part No. 160 78
Oil pressure switch for RUVAC WSLF 1001 and WS-PFPE	Part No. 194 82

Temperature Sensor PT 100

The temperature sensor measures the gas temperature at the centre of the RUVAC delivery flange.

Depending on the size of the RUVAC pump, respectively its flange size, the PT 100 sensor is fitted at different positions.

Ordering Information

Temperature Sensor

Temperature sensor PT 100	Part No. 155 010
---------------------------	-------------------------

Vacuum Pump Oils

Lubricating oils for rotary vacuum pumps need to fulfil demanding requirements. Their vapor pressure must be low also at high temperatures, water content and water uptake must be minimal. Their viscosity characteristics needs to be flat, lubricating properties need to be excellent and they must resist cracking upon being mechanically stressed.

All the vacuum pump oils listed in the following have been subjected in our factory laboratories to very comprehensive tests closely resembling the conditions encountered in practice by the pumps from the RUVAC series.

We therefore recommend the exclusive use of vacuum pump oils fully qualified by Oerlikon Leybold Vacuum so as to ensure optimum performance of the Oerlikon Leybold Vacuum pumps and also to ensure optimum oil change intervals.

Under vacuum conditions lubricating oils, especially those with additives may behave quite differently than expected. Additives may adversely affect the attainable ultimate pressure and may react with the media being pumped.

When using not suitably qualified third party oils, the oil change intervals and the performance of the vacuum pump may be reduced. Also unwanted deposits may occur which may even cause severe damage to the vacuum pump.

For these reasons please understand that we must make our warranty commitment dependent on the use of oils which have been qualified by us. Damages caused by the use of not suitably qualified lubricating oils are not covered by our warranty.

In order to adapt the pumps to the different applications of our customers, different types of oil are used in the RUVAC pumps.

Please note that owing to differing properties not all types of oil may be used in all pumps of the RUVAC series. If you can not find the combination of pump and oil you require please ask us for a quotation.

Lubricant Types

Mineral Oils

Mineral oils are products distilled and refined from crude oil. These do not consist of precisely defined compounds but rather consist of a complex mixture. The way in which the mineral oil is pre-treated and its composition are decisive as to the applications it will be suited for. Depending on the distribution of the hydrocarbons and the dominance of certain properties, mineral oils are grouped according to paraffin-base, naphthenic and aromatic. For the purpose of attaining especially low ultimate pressures, mineral oils must be selected on the basis of a core fraction.

The thermal and chemical resistance of mineral oils has been found to be adequate in the majority of applications. They offer a high degree of compatibility with elastomers and resistance to hydrolysis.

Synthetic Oils

Synthetic oils are produced by a chemical reaction. The group of synthetic oils includes liquids differing widely as to their chemical structure and composition. Correspondingly their physical and chemical properties differ considerably. Synthetic oils are used in those cases where special properties of the oil are required which can not be fulfilled by mineral oils.

The oils given in the following belong to the group of synthetic oils:

Ester Oils

Ester oils are organic compounds which excel especially through their high thermal resistance to cracking compared to mineral oils. Chemical resistance is generally quite good, but will depend on the type of ester oil. Elastomer compatibility and resistance against hydrolysis are not so good compared to mineral oils.

Perfluorinated polyether (PFPE)

These are oils which are only composed of carbon (C), fluorine (F) and oxygen atoms (O). The existing C-O and C-F bonds are highly stable. For this reason PFPE oils are practically inert against all chemical and oxidising influences.

Perfluorinated polyether will not polymerise under the influence of high energy radiation.

PFPE is non-flammable. Oerlikon Leybold Vacuum NC 1/14 has the approval of BAM (Federal Institute for Materials Research and Testing) for pumping of pure oxygen.

Perfluorinated polyether are used when pumping strongly reactive substances like oxygen (O₂), fluorine (F₂) and uranium hexafluoride (UF₆). Regarding Lewis acids (for example, boron trifluoride (BF₃), aluminum trichloride (AlCl₃)) they are not completely inert. Here reactions may take place at temperatures over 100 °C (212 °F).

Perfluorinated polyether are thermally highly stable. Thermal decomposition may only take place at temperatures of over 290 °C (554 °F).

Caution: Perfluorinated polyether will – when decomposed – release toxic and corrosive gases: hydrogen fluoride (HF), carbonyl difluoride (COF₂). For this reason open fires must be avoided in the workspace where PFPE is being used. Do not smoke in the workspace where PFPE is being used.

Only suitably prepared pumps must be used in connection with perfluorinated polyether, since it is essential that the pumps be free of hydrocarbons.

Changing from one basic type of oil to PFPE must be left exclusively to authorised Service Centers. The pump will have to be fully disassembled and carefully cleaned. Gaskets and filters will have to be exchanged and suitable greases will have to be used.

Safety data sheets are available to professional users from:
e-mail “documentation.vacuum@oerlikon.com” or Internet “www.oerlikon.com”.

Overview Oils

Application Data

Special Oil N62

ANDEROL® 555

Type of oil	Paraffin-base mineral oil, core fraction, free of additives	Diester oil
Examples of areas of application and process media	Standard oil For pumping air, chemically inert permanent gases (noble gases, for example), water vapor	Used at elevated temperatures. Pumping of air, chemically inert permanent gases (noble gases, for example), carbon dioxide CO ₂ , carbon monoxide CO, aliphatic compounds (for example, methane CH ₄ , propane C ₃ H ₈ , ethylene C ₂ H ₄), organic solvent vapors
Remarks	The ultimate pressures stated in our catalogs are based on operation of the pump with N62 (except for the PFPE pumps)	
Elastomer compatibility FPM (Viton) NBR (Perbunan) ¹⁾ EPDM	Suited Conditionally suited Not suited	Suited Conditionally suited Not suited

Technical Data

Special Oil N62

ANDEROL® 555

Viscosity			
at 40 °C (104 °F)	mm ² /s	90	94
at 100 °C (212 °F)	mm ² /s	10	9
Flash point	°C (°F)	> 255 (491)	250 (482)
Vapor pressure			
at 20 °C (68 °F)	mbar (Torr)	< 1 x 10 ⁻⁵ (< 0.75 x 10 ⁻⁵)	7 x 10 ⁻⁵ (5.3 x 10 ⁻⁵)
at 100 °C (212 °F)	mbar (Torr)	< 3 x 10 ⁻³ (< 2.3 x 10 ⁻³)	1.5 x 10 ⁻³ (1.1 x 10 ⁻³)
Density at 15 °C (59 °F)	g/ml	0.88 ²⁾	0.96
Pour point	°C (°F)	< -9 (< +16)	-42 (-44)
Middle molecular weight	g/mol	550	530

Ordering Information

Special Oil N62

ANDEROL® 555

1 litre (1.06 qt)	Part No. 177 01	Part No. 200 10 272
5 litres (5.29 qt)	Part No. 177 02	Part No. 200 10 891
20 litres (21.14 qt)	Part No. 177 03	Part No. 200 00 193
180 kg (397.35 lbs)	Part No. 177 05	-

Please note that the technical data stated are only typical data. Slight variations from batch to batch must be expected.

The technical data stated here can not be taken as assured properties.

¹⁾ Resistance to decomposing is very much dependent on the share of acrylonitrile in the NBR

²⁾ at 20 °C (68 °F)

ANDEROL® is a trademark of ANDEROL BV

Application Data**ANDEROL® 2100 HTCL****NC 1/14**

Type of oil	Polyolester	Perfluorinated polyether PFPE
Examples of areas of application and process media	Used in the RUVAC WSLF for operation in connection with gas lasers	For pumping strong oxidants like oxygen, O ₂ , ozone O ₃ , nitrogen oxides NO _x and sulphur oxides (SO ₂ , SO ₃) as well as reactive substances like halogens (for example fluorine F ₂ , chlorine Cl ₂), hydrogen halides (for example hydrogen chloride HCl, hydrogen bromide HBr), uranium hexafluoride UF ₆ and conditionally Lewis acids (for example, boron trichloride BCl ₃)
Remarks		Use only PFPE modified pumps. For operation with PFPE we recommend the exclusive use of such pump types which are equipped with a split-pole motor Mixing with other types of oil must be absolutely avoided
Elastomer compatibility FPM (Viton) NBR (Perbunan) ¹⁾ EPDM	Suited Conditionally suited Not suited	Suited Conditionally suited Not suited

Technical Data**ANDEROL® 2100 HTCL****NC 1/14**

Viscosity			
at 40 °C (104 °F)	mm ² /s	94	47
at 100 °C (212 °F)	mm ² /s	13	5
Flash point	°C (°F)	265 (509)	- ²⁾
Vapor pressure			
at 20 °C (68 °F)	mbar (Torr)	5.0 x 10 ⁻⁵ (3.8 x 10 ⁻⁵)	3.0 x 10 ⁻⁷ (2.3 x 10 ⁻⁷)
at 100 °C (212 °F)	mbar (Torr)	8.5 x 10 ⁻⁴ (6.4 x 10 ⁻⁴)	6.0 x 10 ⁻⁴ (4.5 x 10 ⁻⁴)
Density at 15 °C (59 °F)	g/ml	0.92	1,89 ³⁾
Pour point	°C (°F)	-35 (-31)	-40 (-40)
Middle molecular weight	g/mol	No known	2500

Ordering Information**ANDEROL® 2100 HTCL****NC 1/14**

1 litre (1.06 qt)	Part No. 200 14 333	Part No. 177 38
-------------------	----------------------------	------------------------

Please note that the technical data stated are only typical data. Slight variations from batch to batch must be expected.

The technical data stated here can not be taken as assured properties

¹⁾ Resistance to decomposing is very much dependent on the share of acrylonitrile in the NBR

²⁾ **Caution:** Perfluorinated polyether will, when being decomposed at temperatures over 290 °C (554 °F), release toxic and corrosive gases

For this reason open fires must be avoided in the workspace where PFPE is being used. Do not smoke in the workspace where PFPE is being used

³⁾ at 20 °C (68 °F)

ANDEROL® is a trademark of ANDEROL BV

Only available for purchase in North and South America

Application Data

HE-200

HE-1600

Type of oil	Paraffin-base mineral oil, core fraction, free of additives	Perfluorinated polyether PFPE
Examples of areas of application and process media	Standard oil for Oerlikon Leybold Vacuum USA For pumping air, chemically inert permanent gases (noble gases, for example), water vapor, solvent vapors in the case of laboratory pumps operated with cold traps	For pumping strong oxidants like oxygen, O ₂ , ozone O ₃ , nitrogen oxides NO _x and sulphur oxides (SO ₂ , SO ₃) as well as reactive substances like halogens (for example fluorine F ₂ , chlorine Cl ₂), hydrogen halides (for example hydrogen chloride HCl, hydrogen bromide HBr), uranium hexafluoride UF ₆ and conditionally Lewis acids (for example, boron trichloride BCl ₃)
Remarks	The ultimate pressures stated in operation of the pump with HE-200 (except for the PFPE pumps) Service life may be extended through the use of an oil filter	Use only correspondingly modified pumps. For operation with PFPE we recommend the exclusive use of such pump types which are equipped with a split-pole motor Mixing with other types of oil must be absolutely avoided
Elastomer compatibility FPM (Viton) NBR (Perbunan) ¹⁾ EPDM	Suited Conditionally suited Not suited	Suited Suited Suited

Technical Data

HE-200

HE-1600

Viscosity at 40 °C (104 °F)	mm ² /s	58	–
Viscosity at 20 °C (68 °F)	mm ² /s	–	140
Viscosity at 100 °C (212 °F)	mm ² /s	9	–
Viscosity at 99 °C (210 °F)	mm ² /s	–	7
Flash point	°C (°F)	224 (435)	Not known ²⁾
Vapor pressure at 100 °C (212 °F)	mbar (Torr)	3.9 x 10 ⁻⁴ (2.9 x 10 ⁻⁴)	2.7 x 10 ⁻⁴ (2.0 x 10 ⁻⁴)
Pour point	°C (°F)	-10 (14)	-40 (40)
Middle molecular weight	g/mol	480	3000

Ordering Information

HE-200

HE-1600

1.0 litre (1.06 qt)	Part No. 98 198 006	–
3.8 litres (1 gal)	Part No. 98 198 007	–
18.9 litres (5 gal)	Part No. 98 198 008	–
208 litres (55 gal)	Part No. 98 198 010	–
0.9 kg (2 lbs)	–	Part No. 898 564-1
1.8 kg (4 lbs)	–	Part No. 898 564-2
7.2 kg (16 lbs)	–	Part No. 898 564-4

Please note that the technical data stated are only typical data. Slight variations from batch to batch must be expected.

The technical data stated here can not be taken as assured properties

¹⁾ Resistance to decomposing is very much dependent on the share of acrylonitrile in the NBR

²⁾ **Caution:** Perfluorinated polyether will, when being decomposed at temperatures over 290 °C (554 °F), release toxic and corrosive gases

For this reason open fires must be avoided in the workspace where PFPE is being used. Do not smoke in the workspace where PFPE is being used

Services

On-site Replacement of the Dynamic Seals (with oil N62) *)

The on-site replacement of the dynamic seals includes the following:

Oil change (standard oil N62), partial disassembly of the pump, replacement of the complete shaft seal, visual inspection of the subassemblies, electrical safety test, test run including check of the attained ultimate pressure levels (depending on the installation situation)

Ordering Information

On-site Replacement of the Dynamic Seals (with oil N62) *)

For pump WA/WAU 151/251 WA/WAU 501 WA/WAU 1001 WA/WAU 2001	Part No. AS 1181 F Part No. AS 1182 F Part No. AS 1183 F Part No. AS 1184 F
-------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------

Small On-site Maintenance (with oil N62) *)

The small on-site maintenance includes the following:

Oil change (standard oil N62), visual inspection of the subassemblies, electrical safety test, test run including check of the attained ultimate pressure levels (depending on the installation situation)

Ordering Information

Small On-site Maintenance (with oil N62) *)

For pump WA/WS 151/251 WA/WS 501 WA/WS 1001 WA/WS 2001	Part No. AS 1185 F Part No. AS 1186 F Part No. AS 1187 F Part No. AS 1188 F
---------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------

*) Notes on our on-site after sales service

The listed services include the costs for material and working hours on site for standard RUVAC pumps. Services for pump variants upon request.

Transportation and travelling expenses are invoiced at cost. All services refer to the repair of freely accessible and not contaminated vacuum components.

Complete Refurbishing at the Service Centre (with oil N62)

Complete refurbishing at the service centre includes the following:

Disassembly of the pump, cleaning of all individual components including visual inspection, machined reworking of the housing sections; if required rebalancing of the pair of impellers, replacement of the wearing parts, assembly of the pump including new seals and standard oil N62, electrical safety test, test run including check of the attained ultimate pressure levels.

Ordering Information

Complete Refurbishing at the Service Centre (with oil N62)

For pump	Part No.
WA 151/251	AS 1189
WA 501	AS 1190
WA 1001	AS 1191
WA 2001	AS 1192
WS 151/251	AS 1193
WS 501	AS 1194
WS 1001	AS 1195
WS 2001	AS 1196
WAU 151/251	AS 1197
WAU 501	AS 1198
WAU 1001	AS 1199
WAU 2001	AS 1200
WSU 151/251	AS 1201
WSU 501	AS 1202
WSU 1001	AS 1203
WSU 2001	AS 1204

Complete Refurbishing with Decontamination at the Service Centre (with oil N62)

Complete refurbishing with decontamination at the service centre includes the following:

Disassembly of the pump, cleaning and decontamination of all individual components, visual inspection of all components, machined reworking of the housing sections; if required rebalancing of the pair of impellers, replacement of the wearing parts, assembly of the pump including new seals and standard oil N62, electrical safety test, test run including check of the attained ultimate pressure levels.

Ordering Information

Complete Refurbishing with Decontamination at the Service Centre (with oil N62)

For pump	Part No.
WA 151/251	AS 1189 D
WA 501	AS 1190 D
WA 1001	AS 1191 D
WA 2001	AS 1192 D
WS 151/251	AS 1193 D
WS 501	AS 1194 D
WS 1001	AS 1195 D
WS 2001	AS 1196 D
WAU 151/251	AS 1197 D
WAU 501	AS 1198 D
WAU 1001	AS 1199 D
WAU 2001	AS 1200 D
WSU 151/251	AS 1201 D
WSU 501	AS 1202 D
WSU 1001	AS 1203 D
WSU 2001	AS 1204 D

Sales and Service

Germany

Oerlikon
Leybold Vacuum GmbH
Bonner Strasse 498
D-50968 Cologne
Phone: +49-(0)221-347 1234
Fax: +49-(0)221-347 1245
sales.vacuum@oerlikon.com
www.oerlikon.com

Oerlikon
Leybold Vacuum GmbH
Sales Area North/Northeast
Branch Office Berlin
Buschkrugallee 33
1. Obergeschoss
D-12359 Berlin
Phone: +49-(0)30-435 609 0
Fax: +49-(0)30-435 609 10
sales.vacuum.bn@oerlikon.com

Oerlikon
Leybold Vacuum GmbH
Sales Area South/Southwest
Branch Office Munich
Sendlinger Strasse 7
D-80331 Munich
Phone: +49-(0)89-357 33 9-10
Fax: +49-(0)89-357 33 9-33
sales.vacuum.mn@oerlikon.com
service.vacuum.mn@oerlikon.com

Oerlikon
Leybold Vacuum GmbH
Sales Area West & Benelux
Branch Office Cologne
Bonner Strasse 498
D-50968 Cologne
Phone: +49-(0)221-347 1270
Fax: +49-(0)221-347 1291
sales.vacuum.kn@oerlikon.com

Oerlikon
Leybold Vacuum GmbH
Service Competence Center
Emil-Hoffmann-Strasse 43
D-50996 Cologne-Suerth
Phone: +49-(0)221-347 1439
Fax: +49-(0)221-347 1945
service.vacuum.kn@oerlikon.com

Oerlikon
Leybold Vacuum GmbH
Mobil Customer Service
Emil-Hoffmann-Strasse 43
D-50996 Cologne-Suerth
Phone: +49-(0)221-347 1765
Fax: +49-(0)221-347 1944
service.vacuum.kn@oerlikon.com

Oerlikon
Leybold Vacuum GmbH,
Dresden
Zur Wetterwarte 50, Haus 304
D-01109 Dresden
Service:
Phone: +49-(0)351-88 55 00
Fax: +49-(0)351-88 55 041
info.vacuum.dr@oerlikon.com

Oerlikon
Leybold Vacuum USA Inc.
5700 Mellon Road
USA-Export, PA 15632
Phone: +1-724-327-5700
Fax: +1-724-325-3577
info.vacuum.ex@oerlikon.com

Europe

Belgium
Oerlikon
Leybold Vacuum Nederland B.V.
Belgisch bijkantoor
Leuvensesteenweg 542-9A
B-1930 Zaventem
Sales:
Phone: +32-2-711 00 83
Fax: +32-2-720 83 38
sales.vacuum.zv@oerlikon.com
Service:
Phone: +32-2-711 00 82
Fax: +32-2-720 83 38
service.vacuum.zv@oerlikon.com

France
Oerlikon
Leybold Vacuum France S.A.
7, Avenue du Québec
Z.A. Courtaboef 1 - B.P. 42
F-91942 Courtaboef Cedex
Sales and Service:
Phone: +33-1-69 82 48 00
Fax: +33-1-69 07 57 38
sales.vacuum.or@oerlikon.com

Oerlikon
Leybold Vacuum France S.A.
Valence Factory
640, Rue A. Bergès - B.P. 107
F-26501 Bourg-lès-Valence Cedex
Phone: +33-4-75 82 33 00
Fax: +33-4-75 82 92 69
info.vacuum.vc@oerlikon.com

Great Britain
Oerlikon
Leybold Vacuum UK Ltd.
Unit 2
Silverglade Business Park
Leatherhead Road
UK-Chessington, Surrey KT9 2QL
Sales:
Phone: +44-13-7273 7300
Fax: +44-13-7273 7301
sales.vacuum.ln@oerlikon.com
Service:
Phone: +44-20-8971 7030
Fax: +44-20-8971 7003
service.vacuum.ln@oerlikon.com

Italy
Oerlikon
Leybold Vacuum Italia S.p.A.
8, Via Trasimeno
I-20128 Milano
Sales:
Phone: +39-02-27 22 31
Fax: +39-02-27 20 96 41
sales.vacuum.mi@oerlikon.com
Service:
Phone: +39-02-27 22 31
Fax: +39-02-27 22 32 17
service.vacuum.mi@oerlikon.com

Oerlikon
Leybold Vacuum Italia S.p.A.
Field Service Base
Z.I. Le Capanne
I-05021 Acquasparta (TR)
Phone: +39-0744-93 03 93
Fax: +39-0744-94 42 87
service.vacuum.mi@oerlikon.com

Netherlands
Oerlikon
Leybold Vacuum Nederland B.V.
Proostwetering 24N
NL-3543 AE Utrecht
Sales and Service:
Phone: +31-(30) 242 6330
Fax: +31-(30) 242 6331
sales.vacuum.ut@oerlikon.com
service.vacuum.ut@oerlikon.com

Spain
Oerlikon
Leybold Vacuum Spain, S.A.
C/. Huelva, 7
E-08940 Cornellà de Llobregat
(Barcelona)
Sales:
Phone: +34-93-666 46 16
Fax: +34-93-666 43 70
sales.vacuum.ba@oerlikon.com
Service:
Phone: +34-93-666 49 51
Fax: +34-93-685 40 10
service.vacuum.ba@oerlikon.com

Sweden
Oerlikon
Leybold Vacuum Scandinavia AB
Box 9084
SE-40092 Göteborg
Sales and Service:
Phone: +46-31-68 84 70
Fax: +46-31-68 39 39
info.vacuum.gt@oerlikon.com
Visiting/delivery address:
Datavägen 57B
SE-43632 Askim

Switzerland
Oerlikon
Leybold Vacuum Schweiz AG
Leutschenbachstrasse 55
CH-8050 Zürich
Sales:
Phone: +41-044-308 40 50
Fax: +41-044-302 43 73
sales.vacuum.zh@oerlikon.com
Service:
Phone: +41-044-308 40 62
Fax: +41-044-308 40 60
service.vacuum.zh@oerlikon.com

America

USA
Oerlikon
Leybold Vacuum USA Inc.
5700 Mellon Road
USA-Export, PA 15632
Phone: +1-724-327-5700
Fax: +1-724-325-3577
info.vacuum.ex@oerlikon.com
Sales:
Eastern & Central time zones
Phone: +1-724-327-5700
Fax: +1-724-333-1217
Pacific, Mountain, Alaskan &
Hawaiian time zones
Phone: +1-480-752-9191
Fax: +1-480-752-9494
Service:
Phone: +1-724-327-5700
Fax: +1-724-325-3577

Oerlikon
Leybold Vacuum GmbH
Bonner Strasse 498
D-50968 Cologne
Phone: +49-(0)221-347 0
Fax: +49-(0)221-347 1250
info.vacuum.ex@oerlikon.com

Asia

P.R. China
Oerlikon
Leybold Vacuum (Tianjin)
International Trade Co. Ltd.
Beichen Economic
Development Area (BEDA),
Shanghai Road
Tianjin 300400
China
Sales and Service:
Phone: +86-22-2697 0808
Fax: +86-22-2697 4061
Fax: +86-22-2697 2017
sales.vacuum.tj@oerlikon.com
service.vacuum.tj@oerlikon.com

Oerlikon
Leybold Vacuum
(Tianjin) Co. Ltd.
Beichen Economic
Development Area (BEDA),
Shanghai Road
Tianjin 300400
China
Sales and Service:
Phone: +86-22-2697 0808
Fax: +86-22-2697 4061
Fax: +86-22-2697 2017
info.vacuum.tj@oerlikon.com
service.vacuum.tj@oerlikon.com

Oerlikon
Leybold Vacuum (Tianjin)
International Trade Co. Ltd.
Shanghai Branch:
Add: No.33
76 Futedong San Rd.
Waigaoqiao FTZ
Shanghai 200131
China
Sales and Service:
Phone: +86-21-5064-4666
Fax: +86-21-5064-4668
info.vacuum.sh@oerlikon.com
service.vacuum.tj@oerlikon.com

Oerlikon
Leybold Vacuum (Tianjin)
International Trade Co. Ltd.
Guangzhou Office and
Service Center
1st F, Main Building
Science City Plaza,
No.111 Science Revenue,
Guangzhou Science City
(GZSC) 510663, Guangzhou,
China
Sales:
Phone: +86-20-8723-7873
Phone: +86-20-8723-7597
Fax: +86-20-8723-7875
info.vacuum.gz@oerlikon.com
service.vacuum.tj@oerlikon.com

Oerlikon
Leybold Vacuum (Tianjin)
International Trade Co. Ltd.
Beijing Branch:
1-908, Beijing Landmark Towers
8 North Dongsanhuan Road
Chaoyang District
Beijing 100004
China
Sales:
Phone: +86-10-6590-7622
Fax: +86-10-6590-7607
sales.vacuum.bj@oerlikon.com

India
Oerlikon
Leybold Vacuum India Pvt Ltd.
EL-22, J Block
MIDC Bhosari
Pune 411026
India
Sales and Service:
Phone: +91-20-3061 60000
Fax: +91-20-2712 1571
sales.vacuum.pu@oerlikon.com
service.vacuum.pu@oerlikon.com

Japan
Oerlikon
Leybold Vacuum
Japan Co., Ltd.
Headquarter
23-3, Shin-Yokohama
3-chome
Tobu A.K. Bldg. 4th Floor
Kohoku-ku
Yokohama-shi 222-0033
Sales:
Phone: +81-45-471-3330
Fax: +81-45-471-3323
info.vacuum.yh@oerlikon.com
sales.vacuum.yh@oerlikon.com

Oerlikon
Leybold Vacuum
Japan Co., Ltd.
Osaka Sales Office
5-13, Kawagishi-machi
Suita-chi
Osaka 564-0037
Phone: +81-6-6393-5211
Fax: +81-6-6393-5215
info.vacuum.os@oerlikon.com
sales.vacuum.os@oerlikon.com

Oerlikon
Leybold Vacuum
Japan Co., Ltd.
Tsukuba Technical Service Center
Kogyo Danchi
21, Kasuminosato,
Ami-machi, Inashiki-gun
Ibaraki-ken, 300-0315
Service:
Phone: +81-298 89 2841
Fax: +81-298 89 2838
info.vacuum.iik@oerlikon.com
sales.vacuum.iik@oerlikon.com

Korea
Oerlikon
Leybold Vacuum Korea Ltd.
3F, Jellzone 2 Tower, 159-4
Jeongja-Dong, Bundang-Gu
Sungnam-Si, Gyeonggi-Do
Korea 463-384
Sales:
Phone: +82-31 785 1367
Fax: +82-31 785 1359

623-7, Upsung-Dong
Cheonan-Si
Chungcheongnam-Do
Korea 330-290
Service:
Phone: +82-41 589 3035
Fax: +82-41 588 0166

Singapore
Oerlikon
Leybold Vacuum
Singapore Pte Ltd.
No.1, International Business Park
B1-20B, The Synergy
Singapore 609917

Sales and Service:
Phone: +65-6303 7000
Fax: +65-67730 039
sales.vacuum.sg@oerlikon.com
service.vacuum.sg@oerlikon.com

Taiwan
Oerlikon
Leybold Vacuum Taiwan Ltd.
No 416-1, Sec. 3
Chung-Hsin Rd., Chu-Tung
Hsin-Chu, Taiwan, R.O.C.
Sales and Service:
Phone: +886-3-500 1688
Fax: +886-3-583 3999
sales.vacuum.hc@oerlikon.com
service.vacuum.hc@oerlikon.com

oerlikon
leybold vacuum

www.oerlikon.com